



KLJ Series

- Doesn't spark with DC over voltage
- Endurance with ripple current : 2,000 hours at 105°C
- Non solvent resistant type
- ESR value prescribed
- RoHS2 Compliant

Doesn't spark with DC over voltage!

KLJ

↓
Downsized
↑
KLG





SPECIFICATIONS

Items	Characteristics				
Category	-25 to +105°C				
Temperature Range	-25 to +105°C				
Rated Voltage Range	200 to 450V _{dc}				
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)				
Leakage Current	I=0.04CV+100 Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 1 minute)				
Dissipation Factor (tan δ)	Rated voltage (V _{dc})	200V	400V	450V	
	tan δ (Max.)	0.20	0.24	0.24	(at 20°C, 120Hz)
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	200V	400V	450V	
	Z(-25°C)/Z(+20°C)	4	6	6	(at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 2,000 hours at 105°C.				
	Capacitance change	≤ ±20% of the initial value			
	D.F. (tan δ)	≤200% of the initial specified value			
	Leakage current	≤The initial specified value			
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.				
	Capacitance change	≤ ±20% of the initial value			
	D.F. (tan δ)	≤200% of the initial specified value			
	Leakage current	≤500% of the initial specified value			


DIMENSIONS [mm]

Terminal Code : E

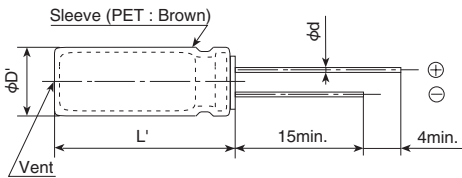

φD	10	12.5	16	18
φd	0.6	0.6	0.8	0.8
F	5.0	5.0	7.5	7.5
φD'	φD+0.5max.			
L'	L+1.5max.			

PART NUMBERING SYSTEM

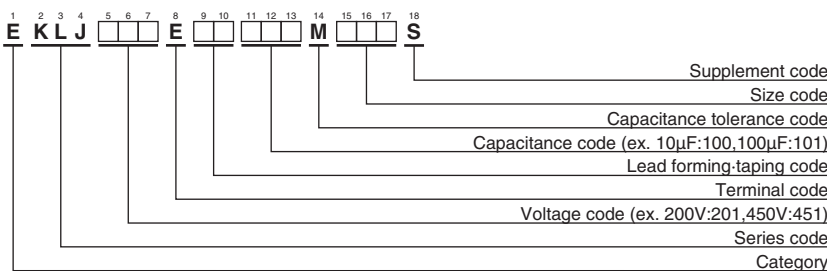

Please refer to "Product code guide (radial lead type)"

RATED RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Capacitance(μF)	Frequency(Hz)					
	120	300	1k	10k	50k	100k
10μF	1.00	1.35	1.75	2.30	2.50	2.70
15 to 47μF	1.00	1.25	1.50	1.75	1.80	1.85
56 to 330μF	1.00	1.15	1.30	1.40	1.50	1.60

The deterioration of aluminum electrolytic capacitors accelerates their life due to the internal heating produced by ripple current. For details, refer to Section "5-3 Ripple Current Effect on Lifetime" in the catalog, Technical Note.



◆STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Case size φ D×L(mm)	tan δ	ESR (Ω max/20°C, 100kHz)	Rated ripple current (mA rms/105°C, 120Hz)	Part No.
200	33	10 × 20	0.20	1.8	165	EKLJ201E□□330MJ20S
	39	10 × 25	0.20	1.4	200	EKLJ201E□□390MJ25S
	56	12.5 × 20	0.20	1.0	265	EKLJ201E□□560MK20S
	82	12.5 × 25	0.20	0.72	350	EKLJ201E□□820MK25S
	100	16 × 20	0.20	0.63	390	EKLJ201E□□101ML20S
	120	16 × 25	0.20	0.44	465	EKLJ201E□□121ML25S
	150	18 × 20	0.20	0.31	505	EKLJ201E□□151MM20S
	180	16 × 31.5	0.20	0.36	615	EKLJ201E□□181MLN3S
	180	18 × 25	0.20	0.30	585	EKLJ201E□□181MM25S
	220	16 × 35.5	0.20	0.30	695	EKLJ201E□□221MLP1S
	220	18 × 31.5	0.20	0.28	700	EKLJ201E□□221MMN3S
270	18 × 35.5	0.20	0.24	805	EKLJ201E□□271MMP1S	
330	18 × 40	0.20	0.21	900	EKLJ201E□□331MM40S	
400	10	10 × 16	0.24	5.7	64	EKLJ401E□□100MJ16S
	15	10 × 20	0.24	4.0	105	EKLJ401E□□150MJ20S
	18	10 × 25	0.24	3.2	110	EKLJ401E□□180MJ25S
	22	12.5 × 20	0.24	2.7	165	EKLJ401E□□220MK20S
	27	12.5 × 25	0.24	1.9	200	EKLJ401E□□270MK25S
	33	16 × 20	0.24	1.5	225	EKLJ401E□□330ML20S
	39	18 × 20	0.24	1.2	255	EKLJ401E□□390MM20S
	47	16 × 25	0.24	1.1	290	EKLJ401E□□470ML25S
	47	18 × 20	0.24	1.2	280	EKLJ401E□□470MM20S
	56	16 × 31.5	0.24	0.84	340	EKLJ401E□□560MLN3S
	68	16 × 35.5	0.24	0.72	385	EKLJ401E□□680MLP1S
	68	18 × 25	0.24	0.88	360	EKLJ401E□□680MM25S
	82	16 × 40	0.24	0.65	435	EKLJ401E□□820ML40S
	82	18 × 31.5	0.24	0.64	425	EKLJ401E□□820MMN3S
100	18 × 35.5	0.24	0.54	490	EKLJ401E□□101MMP1S	
120	18 × 40	0.24	0.49	540	EKLJ401E□□121MM40S	
450	39	16 × 25	0.24	1.4	265	EKLJ451E□□390ML25S
	39	18 × 20	0.24	1.4	255	EKLJ451E□□390MM20S
	47	16 × 25	0.24	1.3	290	EKLJ451E□□470ML25S
	47	18 × 25	0.24	1.2	320	EKLJ451E□□470MM25S
	56	16 × 31.5	0.24	1.1	340	EKLJ451E□□560MLN3S
	68	16 × 35.5	0.24	0.86	420	EKLJ451E□□680MLP1S
	68	18 × 31.5	0.24	0.91	390	EKLJ451E□□680MMN3S
	82	16 × 40	0.24	0.79	435	EKLJ451E□□820ML40S
	82	18 × 31.5	0.24	0.78	425	EKLJ451E□□820MMN3S
	100	18 × 40	0.24	0.67	490	EKLJ451E□□101MM40S
	110	18 × 40	0.24	0.59	540	EKLJ451E□□111MM40S
120	18 × 45	0.24	0.58	570	EKLJ451E□□121MM45S	

□ □ : Enter the appropriate lead forming or taping code.


◆DC OVERVOLTAGE TEST CONDITIONS

The vent will operate and the capacitor shall become an open circuit without burning materials when the following excess DC voltage is applied.

●Test DC voltage

Rated voltage	Nominal capacitance	Current limit	Test DC voltage
200V _{dc}	< 330μF	4A	300/375V _{dc}
	330μF	5A	
400V _{dc}	< 100μF	2A	500/600V _{dc}
	100μF ≤ C ≤ 120μF	4A	
450V _{dc}	< 100μF	2A	550/675V _{dc}
	100μF ≤ C ≤ 120μF	4A	

●Test circuit



Constant DC voltage/current power supply



- Always read "Notes on Use" before using the product in order to enable you to use the product correctly and prevent any faults and accidents from occurring.
- Request the Product Specification on the product of NIPPON CHEMI-CON CORPORATION to refer to it as well as this brochure prior to the order of the products. Some specific notes on use of the ordered product may be described in the specifications.
- The products listed in this catalog are designed and manufactured for general electronics equipment use and are not intended for use in applications that can adversely affect human life; where the malfunction of equipment may cause damage to life or property. In addition, our products are not intended to be used in specific applications that may cause a major social impact. Please consult with us in advance of usage of our products in the following listed applications. ① Aerospace equipment ② Power generation equipment such as thermal power, nuclear power etc. ③ Medical equipment ④ Transport equipment (automobiles, trains, ships, etc.) ⑤ Transportation control equipment ⑥ Disaster prevention / crime prevention equipment ⑦ Highly publicized information processing equipment ⑧ Submarine equipment ⑨ Other applications that are not considered general-purpose applications.
- The circuits described as examples in this catalog and the "delivery specifications" are featured in order to show the operations and usage of our products, however, this fact does not guarantee that the circuits are available to function in your equipment systems. We are not in any case responsible for any failures or damage caused by the use of information contained herein. You should examine our products, of which the characteristics are described in the "delivery specifications" and other documents, and determine whether or not our products suit your requirements according to the specifications of your equipment systems. Therefore, you bear final responsibility regarding the use of our products.
Please make sure that you take appropriate safety measures such as use of redundant design and malfunction prevention measures in order to prevent fatal accidents and/or fires in the event any of our products malfunction.
- We strongly recommend our customers to purchase Nippon Chemi-Con products only through our official sales channels. We assume no responsibility for any defects or damages caused by using products purchased from outside our official sales channel or of counterfeit goods. In addition, we will ask the customer to pay the investigation cost for products purchased outside our official sales channel.
- We reserve the right to discontinue production and delivery of products. We do not guarantee that all the products included in this catalog will be available in the future.
The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products
- We continually strive to improve the quality and reliability of our products, but in any case that our product does not meet our published specifications, please stop using it promptly and contact us immediately. As for compensation for non-conforming goods delivered by Chemi-Con, we will limit it only to goods found in non-compliance of our published specifications. This may be accomplished by a no cost replacement of non-conforming individual products, a credit of the piece price paid per each individual non-conforming product, or in other ways deemed necessary.
In addition, we have an established system with enhanced traceability, therefore we will limit the applicable lot items for any potential compensation.

[Part Numbering System](#)

[Part Numbering System \(Appendix\)](#)

[Standardization](#)

[Available Items by Manufacturing Locations](#)

[Environmental Measures](#)

[Technical Note](#)

[Precautions and Guidelines](#)

[Recommended Soldering Conditions](#)

[Taping, Lead-preforming and Packaging](#)

[Available Terminals for Snap-in and Screw Mount Type](#)