




金属化聚丙烯膜抗干扰电容器(X2类, 400Vac) Metallized polypropylene film Interference Suppression capacitor(Class X2, 400Vac)

外形图 Outline Drawing

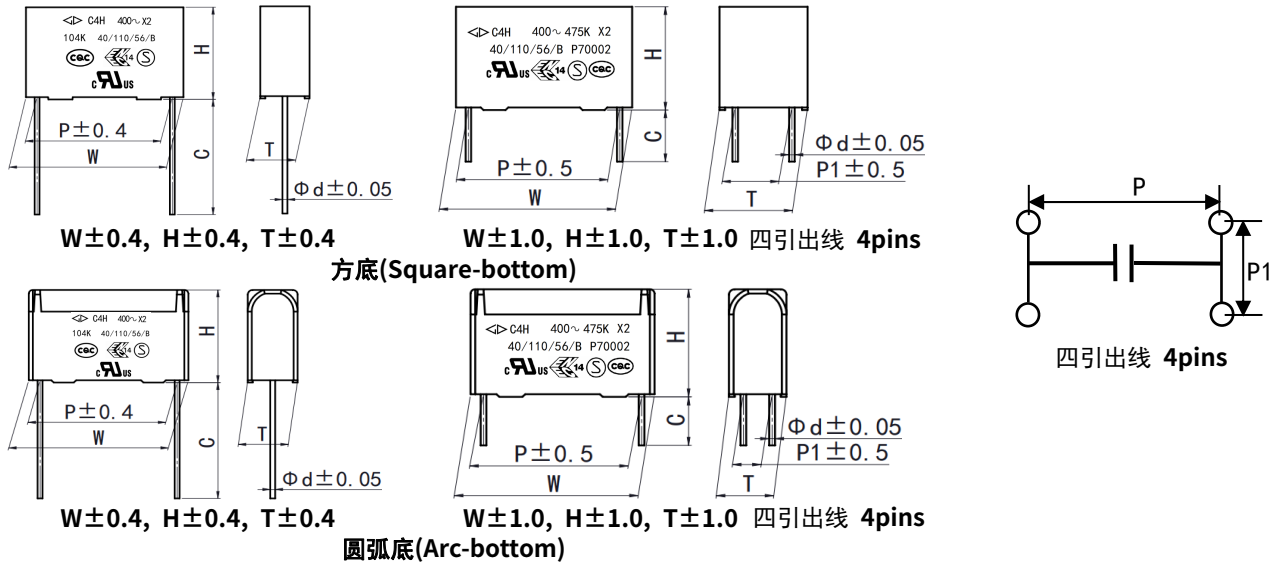

特点

- 金属化聚丙烯
- 能承受过压冲击
- 优异的阻燃性能
- 用于电源跨线路等抗干扰场合

Features


- Metallized polypropylene structure
- Withstanding overvoltage stressing
- Excellent active and passive flame resistant abilities
- Used in across-the-line, interference suppression circuit

安全认证 Safety Approvals

●		CQC (中国)	IEC 60384-14:2013, X2, 400Vac, 0.010μF ~ 15.0μF, 40/110/56/B 证书号(Certificate No.): CQC15001129411
●		ENEC-SEMKO (欧盟)	EN 60384-14:2013+A1:2016, X2, 400Vac, 0.010μF ~ 15.0μF, 40/110/56/B 证书号(Certificate No.): SE/0366-7B
●		UL/CUL (美国/加拿大)	UL 60384-14:2014, CSA E60384-14:09, X2, 400Vac, 0.010μF ~ 10.0μF, 40/110/56/B 证书号(File No.): E186600, CCN: FOWX2/8

技术要求 Specifications

气候类别/阻燃等级 Climatic Category/Passive Flammability Category	40/110/56/B		
工作温度范围 Operating Temperature Range	-40°C ~ +110°C		
额定电压 Rated Voltage(U _R)	400Vac, 50Hz/60Hz		
最大连续直流电压 Maximum continuous DC voltage	760Vdc		
电容量范围 Capacitance Range	0.010μF ~ 10.0μF		
电容量偏差 Capacitance Tolerance	±10%(K), ±20%(M)		
耐电压 Voltage Proof	引线之间 Between Terminals:	4.3U _R (Vdc), 2s	
	极壳之间 Between Terminals To Case:	2 300Vac, 1min	
绝缘电阻 Insulation Resistance	R ≥ 15 000MΩ, RC _N ≥ 5 000s,	C _N ≤ 0.33μF C _N > 0.33μF	(20°C, 100V, 1min)
损耗角正切 Dissipation Factor(tanδ)	0.010μF ≤ C _N ≤ 0.47μF	≤ 15 × 10 ⁻⁴ (20°C, 1kHz)	≤ 30 × 10 ⁻⁴ (20°C, 10kHz)
	0.47μF < C _N ≤ 1.0μF	≤ 20 × 10 ⁻⁴ (20°C, 1kHz)	≤ 40 × 10 ⁻⁴ (20°C, 10kHz)
	1.0μF < C _N ≤ 10.0μF	≤ 30 × 10 ⁻⁴ (20°C, 1kHz)	-----
注: 1. 如果需要用到承载一定纹波电流场合, 建议选用C6A等专用的滤波电容器; 如有疑问, 请与我司技术工程师联系; 2. 若用于户外或长期湿度较大场合, 建议选用防潮设计。	If used in application which has ripple current applied, recommend to use AC filter series: C6A etc; If have any questions please contact our technical engineer for more detail; For outdoor or severe humidity condition application, recommend to use THB series.		



C4H
Code:C4H

■ **产品编码说明 Part number system**

■ 15 位产品代码如下:


The 15 digits part number is formed as follow:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
C	4	H												

第 1~3 位	型号代码 C4H	Digit 1 to 3	Series code C4H
第 4~5 位	交流额定电压 G2=400V	Digit 4 to 5	AC rated voltage G2=400V
第 6~8 位	标称容量 举例: 103=10×10³pF=0.01μF	Digit 6 to 8	Rated capacitance value for example: 103=10×10³pF=0.01μF
第 9 位	容量偏差 K=±10%, M=±20%	Digit 9	Capacitance tolerance K=±10%, M=±20%
第 10 位	引线脚距 P 4=10.0mm 6=15.0mm 9=22.5mm B=27.5mm F=37.5mm M=52.5mm	Digit 10	Pitch 4=10.0mm 6=15.0mm 9=22.5mm B=27.5mm F=37.5mm M=52.5mm
第 11 位	内部特征码	Digit 11	Internal use
第 12~15 位	引线加工和包装代码	Digit 12 to 15	Lead form and packaging code

■ **Table 1 引线加工和包装代码 lead form and packaging code**

第 12 位 Digit 12		第 13 位 Digit 13		第 14 位 Digit 14		第 15 位 Digit 15	
代码 Code	说明 explanation	代码 Code	说明 explanation	代码 Code	说明 explanation	代码 Code	说明 explanation
A	弹带包装 ammo-pack	3 4 6	F=7.5mm F=10.0mm F=15.0mm	0	表示直脚 straight	1 5	产品在连续的两个载带孔之间 each cap.among two consecutive holes P3=12.7mm, H=18.5mm (For pitch=7.5mm) P3=25.4mm; H=18.5mm (For pitch=10.0/15.0mm) (Detail parameter refer to page 16)
C	直脚 Straight lead "C" in the figure above	代码 Code 00 45	说明 explanation 标准的引线长度(18mm~26 mm) standard lead length 引线长度 4.5mm lead length 4.5mm			0	引线长度偏差±0.5mm 或标准长度 Length tolerance ±0.5mm Or standard length
D E M	软绝缘线(多股) Insulated stranded leads 硬绝缘线(单股) Insulated solid leads 软绝缘线(多股), 外壳带正底安装耳 Insulated stranded leads Box with mounting foot	C5 K0 K2 L0	35mm 100mm 120mm 200mm 注 1: 这里的长度包含剥线长度 Note 1: This length includes the stripping parts 注 2: 一般 P≥27.5mm 产品才可选用绝缘线方式 Note 2: Normally, for P≥27.5mm Caps can choice Insulated leads			1 2 3 4	引线长度偏差 -5mm~0mm Length tolerance -5 mm~0 mm 引线长度偏差 0 mm~+5 mm Length tolerance 0 mm~+5 mm 引线长度偏差 0 mm~+10mm Length tolerance 0 mm~+10mm 引线长度偏差±5 mm Length tolerance ±5 mm
T 3	P1=20.3mm±0.5mm P1=20mm±0.5mm	45 55	引线长度 4.5mm lead length 4.5mm 引线长度 5.5mm lead length 5.5mm			0	引线长度偏差±0.5mm 或标准长度 Length tolerance ±0.5mm Or standard length



■ 外形尺寸 Dimensions(mm)

400Vac						
C _N (μF)	W	H	T	P	d	Part number
0.010	13.0	9.0	4.0	10.0	0.6	C4HG2103-40****
0.012	13.0	9.0	4.0	10.0	0.6	C4HG2123-40****
0.015	13.0	9.0	4.0	10.0	0.6	C4HG2153-40****
0.018	13.0	11.0	5.0	10.0	0.6	C4HG2183-40****
0.022	13.0	11.0	5.0	10.0	0.6	C4HG2223-40****
0.027	13.0	11.0	5.0	10.0	0.6	C4HG2273-40****
0.033	13.0	12.0	6.0	10.0	0.6	C4HG2333-40****
0.039	13.0	12.0	6.0	10.0	0.6	C4HG2393-40****
0.047	13.0	12.0	6.0	10.0	0.6	C4HG2473-40****
0.056	13.0	13.0	7.0	10.0	0.6	C4HG2563-40****
0.068	13.0	14.0	8.0	10.0	0.6	C4HG2683-40****
0.022	17.5	9.5	5.0	15.0	0.6	C4HG2223-60****
0.027	17.5	9.5	5.0	15.0	0.6	C4HG2273-60****
0.033	17.5	9.5	5.0	15.0	0.6	C4HG2333-60****
0.039	17.5	9.5	5.0	15.0	0.6	C4HG2393-60****
0.047	17.5	11.0	5.0	15.0	0.6	C4HG2473-60****
0.056	17.5	11.0	5.0	15.0	0.6	C4HG2563-60****
0.068	17.5	12.0	6.0	15.0	0.6	C4HG2683-60****
0.082	17.5	12.0	6.0	15.0	0.6	C4HG2823-60****
0.10	17.5	13.5	7.5	15.0	0.6	C4HG2104-60****
0.12	17.5	13.5	7.5	15.0	0.6	C4HG2124-60****
0.15	17.5	14.5	8.5	15.0	0.6	C4HG2154-60****
0.18	17.5	14.5	8.5	15.0	0.6	C4HG2184-60****
0.22	17.5	16.0	10.0	15.0	0.8	C4HG2224-60****
0.27	17.5	19.0	11.0	15.0	0.8	C4HG2274-60****
0.33	17.5	19.0	11.0	15.0	0.8	C4HG2334-60****
0.10	26.5	15.0	6.0	22.5	0.8	C4HG2104-90****
0.12	26.5	15.0	6.0	22.5	0.8	C4HG2124-90****
0.15	26.5	15.0	6.0	22.5	0.8	C4HG2154-90****
0.18	26.5	16.0	7.0	22.5	0.8	C4HG2184-90****
0.22	26.5	16.0	7.0	22.5	0.8	C4HG2224-90****
0.27	26.5	17.0	8.5	22.5	0.8	C4HG2274-90****
0.33	26.5	17.0	8.5	22.5	0.8	C4HG2334-90****
0.39	26.5	18.5	10.0	22.5	0.8	C4HG2394-90****
0.47	26.5	18.5	10.0	22.5	0.8	C4HG2474-90****
0.56	26.5	20.0	11.0	22.5	0.8	C4HG2564-90****
0.68	26.5	22.0	12.0	22.5	0.8	C4HG2684-90****
0.82	26.5	23.0	13.5	22.5	0.8	C4HG2824-90****
1.0	26.5	24.5	15.5	22.5	0.8	C4HG2105-90****

400Vac						
C _N (μF)	W	H	T	P	d	Part number
0.39	32.0	18.0	9.0	27.5	0.8	C4HG2394-B0****
0.47	32.0	18.0	9.0	27.5	0.8	C4HG2474-B0****
0.56	32.0	20.0	11.0	27.5	0.8	C4HG2564-B0****
0.68	32.0	20.0	11.0	27.5	0.8	C4HG2684-B0****
0.82	32.0	22.0	13.0	27.5	0.8	C4HG2824-B0****
1.0	32.0	22.0	13.0	27.5	0.8	C4HG2105-B0****
1.2	32.0	25.0	13.0	27.5	0.8	C4HG2125-B0****
1.5	32.0	28.0	14.0	27.5	0.8	C4HG2155-B0****
1.8	32.0	30.0	16.0	27.5	0.8	C4HG2185-B0****
2.2	32.0	33.0	18.0	27.5	0.8	C4HG2225-B0****
2.7	32.0	34.0	20.0	27.5	0.8	C4HG2275-B0****
3.3	32.0	37.0	22.0	27.5	0.8	C4HG2335-B0****
3.9M	32.0	37.0	22.0	27.5	0.8	C4HG2395MB0****
1.0	41.0	22.0	11.0	37.5	1.0	C4HG2105-F0****
1.2	41.0	24.0	13.0	37.5	1.0	C4HG2125-F0****
1.5	41.0	24.0	13.0	37.5	1.0	C4HG2155-F0****
1.8	41.0	26.0	15.0	37.5	1.0	C4HG2185-F0****
2.2	41.0	30.0	16.0	37.5	1.0	C4HG2225-F0****
2.7	41.0	32.0	17.0	37.5	1.0	C4HG2275-F0****
3.3	41.0	33.5	18.5	37.5	1.0	C4HG2335-F0****
★ 3.9	41.0	34.0	20.0	37.5	1.0	C4HG2395-F0****
4.7	41.0	37.0	22.0	37.5	1.0	C4HG2475-F0****
★ 5.6	41.0	37.0	26.0	37.5	1.0	C4HG2565-F0****
6.8	41.0	43.0	28.0	37.5	1.0	C4HG2685-F0****
8.2	42.0	45.0	30.0	37.5	1.0	C4HG2825-F0****
10.0	42.0	50.0	35.0	37.5	1.0	C4HG2106-F0****
8.2	57.0	45.0	30.0	52.5	1.2	C4HG2825-M0T***
10.0	57.0	45.0	30.0	52.5	1.2	C4HG2106-M0T***

- 备注 Note: 1. “-”表示容量偏差。 “-”=capacitance tolerance code. M=±20%, K=±10%。
 2. “****”表示引线加工和包装代码(见表1)。“****”=lead form and packing code(refer to table 1).
 3. “★”表示外壳为圆弧底。“★”=Arc bottom of the outer shell.