




GK150HF60T1VH-FN

IGBT Module

Features:

- Non Punch Through (NPT) Technology
- Short Circuit Rated > 10 μ s
- Low Saturation Voltage
- Low Switching Loss
- 100% RBSOA Tested (2xI_c)
- Low Stray Inductance
- Lead Free, Compliant with RoHS Requirement

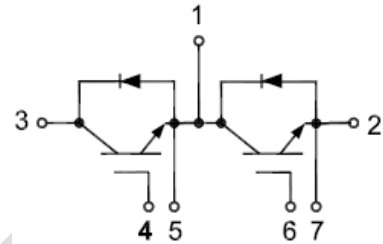

Applications:

- Welding Machine, Cutting Machine
- Plating Power Supply, Induction Heating
- SMPS, UPS

IGBT, Inverter Maximum Rated Values of IGBT

V _{CES}	Collector-Emitter Blocking Voltage	T _J =25°C	600	V
V _{GES}	Gate-Emitter Voltage		±20	V
I _c	Continuous Collector Current	T _C =80°C	150	A
		T _C =25°C	185	A
I _{CM}	Repetitive Peak Collector Current	t _p =1ms	300	A
t _{sc}	Short Circuit Withstand Time		>10	μs
P _D	Maximum Power Dissipation per IGBT	T _C =25°C T _{Jmax} =150°C	730	W



Electrical Characteristics of IGBT

Static Characteristics

Symbol	Description	Conditions	Min	Typ	Max	Unit
$V_{GE(th)}$	Gate-Emitter Threshold Voltage	$I_C=6mA, V_{CE}=V_{GE}, T_J=25^\circ C$	4.0	5.2	5.5	V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=150A, V_{GE}=15V$	$T_J=25^\circ C$	2.20	2.50	V
			$T_J=125^\circ C$	2.40		V
I_{CES}	Collector-Emitter Leakage Current	$V_{GE}=0V, V_{CE}=V_{CES}, T_J=25^\circ C$			1	mA
I_{GES}	Gate-Emitter Leakage Current	$V_{GE}=\pm 20V, V_{CE}=0V, T_J=25^\circ C$			200	nA
C_{ies}	Input Capacitance	$V_{CE}=25V, V_{GE}=0V, f=100kHz, T_J=25^\circ C$		5.57		nF
C_{oes}	Output Capacitance			0.84		nF
C_{res}	Reverse Transfer Capacitance			0.55		nF

Switching Characteristics

$t_{d(on)}$	Turn-on Delay Time	$V_{CC}=300V, I_C=150A, R_{Gon}=10\Omega, V_{GE}=\pm 15V, \text{Inductive Load}$	$T_J=25^\circ C$	526		ns
			$T_J=125^\circ C$	517		
t_r	Rise Time	$V_{CC}=300V, I_C=150A, R_{Gon}=10\Omega, V_{GE}=\pm 15V, \text{Inductive Load}$	$T_J=25^\circ C$	152		ns
			$T_J=125^\circ C$	152		
$t_{d(off)}$	Turn-off Delay Time	$V_{CC}=300V, I_C=150A, R_{Goff}=10\Omega, V_{GE}=\pm 15V, \text{Inductive Load}$	$T_J=25^\circ C$	634		ns
			$T_J=125^\circ C$	646		
t_f	Fall Time	$V_{CC}=300V, I_C=150A, R_{Goff}=10\Omega, V_{GE}=\pm 15V, \text{Inductive Load}$	$T_J=25^\circ C$	112		ns
			$T_J=125^\circ C$	113		
E_{on}	Turn-on Switching Loss	$V_{CC}=300V, I_C=150A, R_{Gon}=10\Omega, V_{GE}=\pm 15V, di/dt=870A/\mu s (T_J=125^\circ C) \text{ Inductive Load}$	$T_J=25^\circ C$	3.65		mJ
			$T_J=125^\circ C$	3.80		
E_{off}	Turn-off Switching Loss	$V_{CC}=300V, I_C=150A, R_{Goff}=10\Omega, V_{GE}=\pm 15V, du/dt=1780V/\mu s (T_J=125^\circ C) \text{ Inductive Load}$	$T_J=25^\circ C$	5.74		mJ
			$T_J=125^\circ C$	6.90		
Q_g	Total Gate Charge	$V_{GE}=+15V \dots -15V$	$T_J=25^\circ C$	791		nC
R_G	Internal Gate Resistance		$T_J=25^\circ C$	16.5		Ω
RBSOA	$I_C=300A, V_{CC}=480V, V_p=600V, R_G=10\Omega, V_{GE}=+15V \text{ to } 0V, T_J=150^\circ C$			Trapezoid		
SCSOA	$V_{CC}=300V, V_{GE}=15V, T_J=150^\circ C$			10		μs
$R_{\theta JC}$	IGBT Thermal Resistance: Junction-To-Case				0.171	$^\circ C/W$



Diode, Inverter Maximum Rated Values of Diode

V_{RRM}	Repetitive Peak Reverse Voltage	$T_J=25^{\circ}\text{C}$	600	V
I_F	Diode Continuous Forward Current		150	A
I_{FM}	Diode Maximum Forward Current	$t_p=1\text{ms}$	300	A

Electrical Characteristics of Diode ($T_C=25^{\circ}\text{C}$ unless otherwise specified)


Symbol	Description	Conditions	Min	Typ	Max	Unit
V_{FM}	Forward Voltage	$I_F=150\text{A}$	$T_J=25^{\circ}\text{C}$	1.80	2.00	V
			$T_J=125^{\circ}\text{C}$	1.85		
t_{rr}	Reverse Recovery Time		$T_J=25^{\circ}\text{C}$	112		ns
			$T_J=125^{\circ}\text{C}$	166		
I_{rr}	Peak Reverse Recovery Current	$I_F=150\text{A}$, $-di_F/dt = 1060\text{A}/\mu\text{s}(T_J=125^{\circ}\text{C})$, $V_R=300\text{V}$, $V_{GE}=-15\text{V}$	$T_J=25^{\circ}\text{C}$	37.5		A
			$T_J=125^{\circ}\text{C}$	56.3		
Q_{rr}	Reverse Recovery Charge		$T_J=25^{\circ}\text{C}$	2.75		μC
			$T_J=125^{\circ}\text{C}$	5.90		
E_{rec}	Reverse Recovery Energy		$T_J=25^{\circ}\text{C}$	0.36		mJ
			$T_J=125^{\circ}\text{C}$	1.23		
$R_{\theta JC}$	Diode Thermal Resistance: Junction-To-Case				0.404	$^{\circ}\text{C}/\text{W}$



Module

Symbol	Description	Min	Typ	Max	Unit
V _{iso}	Isolation Voltage (All Terminals Shorted)	RMS, f=50Hz, 1minute	2500		V
T _J	Maximum Junction Temperature			150	°C
T _{JOP}	Maximum Operating Junction Temperature Range	-40		+150	°C
T _{stg}	Storage Temperature	-40		+125	°C
CTI	Comparative Tracking Index	200			
R _{ecs}	Case-To-Sink Thermally (Conductive Grease Applied)			0.07	°C/W
T	Power Terminals Screw:M5	3.0		5.0	N·m
T	Mounting Screw:M6	4.0		6.0	N·m
G	Weight		165		g

Ordering Information Table

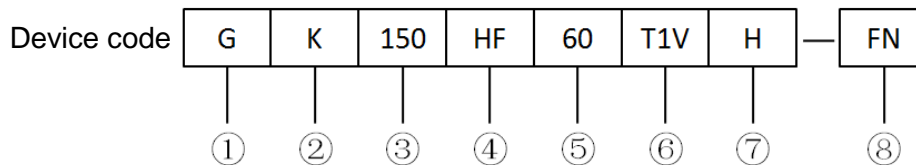

- ① - IGBT Module
- ② - Non Punch Through (NPT) Technology
- ③ - Rated Current (150=150A)
- ④ - Circuit Configuration (HF=Half Bridge)
- ⑤ - Rated Voltage (60=600V)
- ⑥ - Package Type
- ⑦ - Test Level (Pass the Important Reliability Test-Industrial Grade)
- ⑧ - Internal Control Code

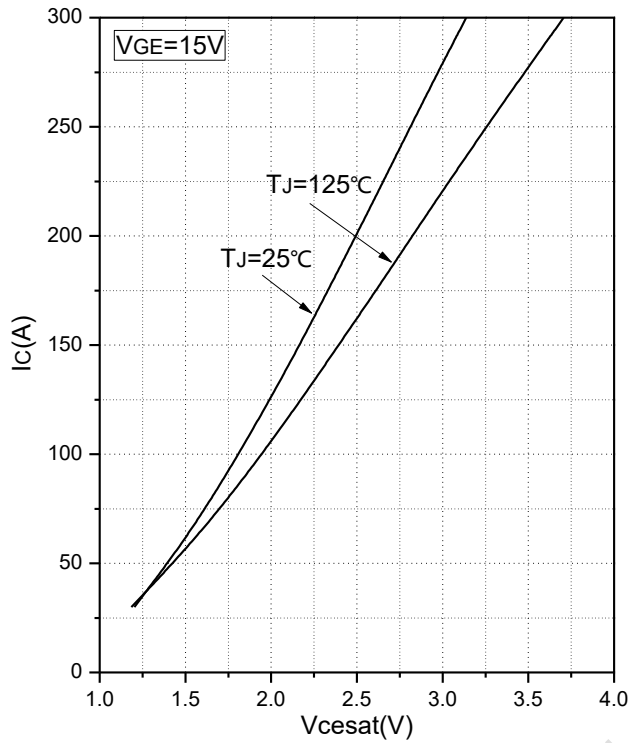


Fig.1 Typical Saturation Voltage Characteristics

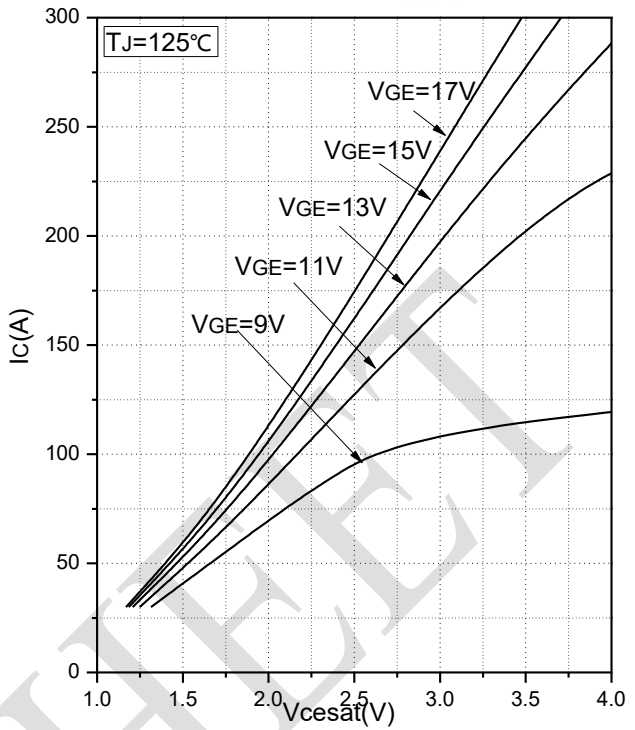


Fig.2 Typical Output Characteristics

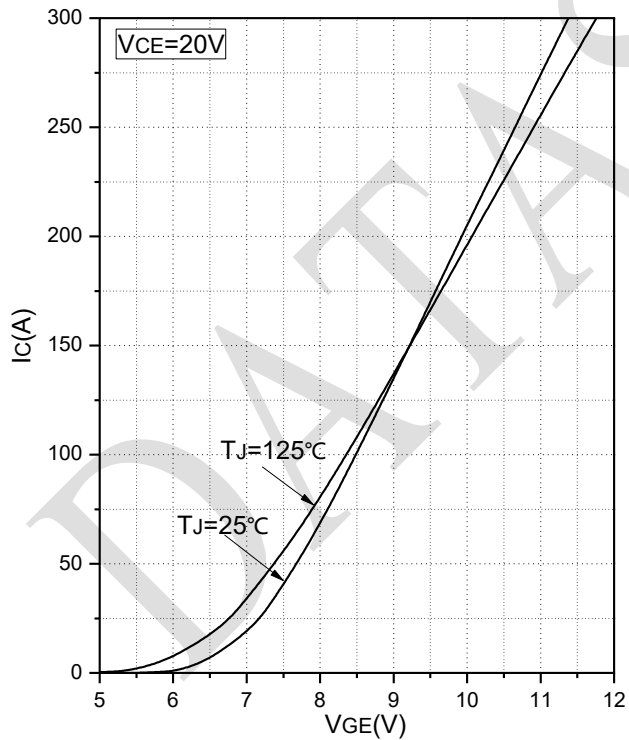


Fig.3 Transfer Characteristic

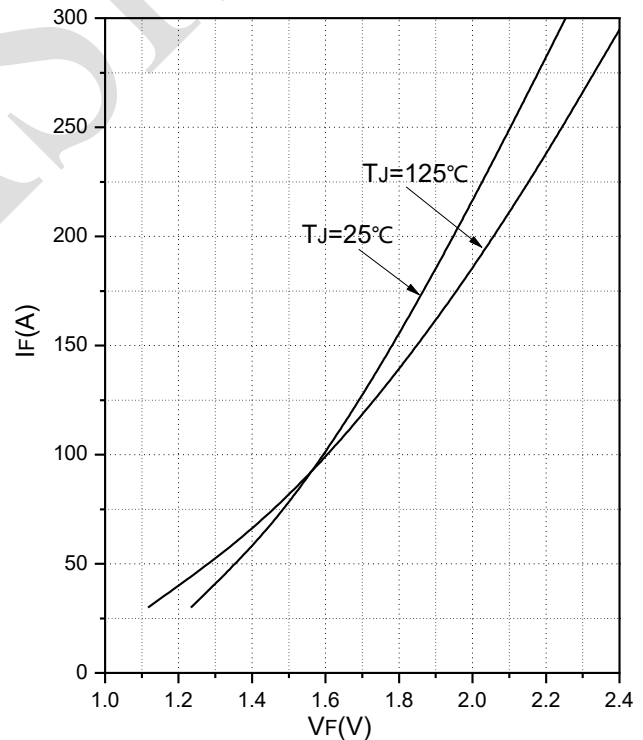


Fig.4 Forward Characteristics of Diode

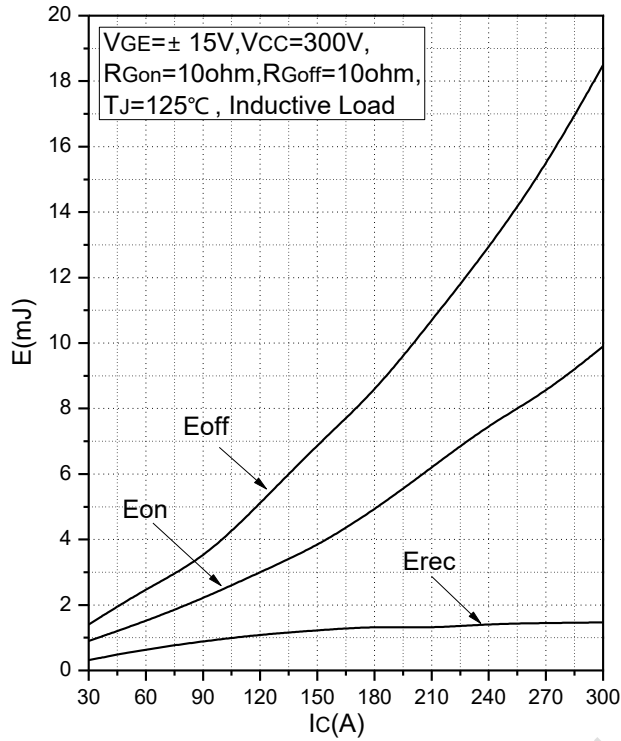


Fig.5 Typical Switching Loss vs. Collector Current

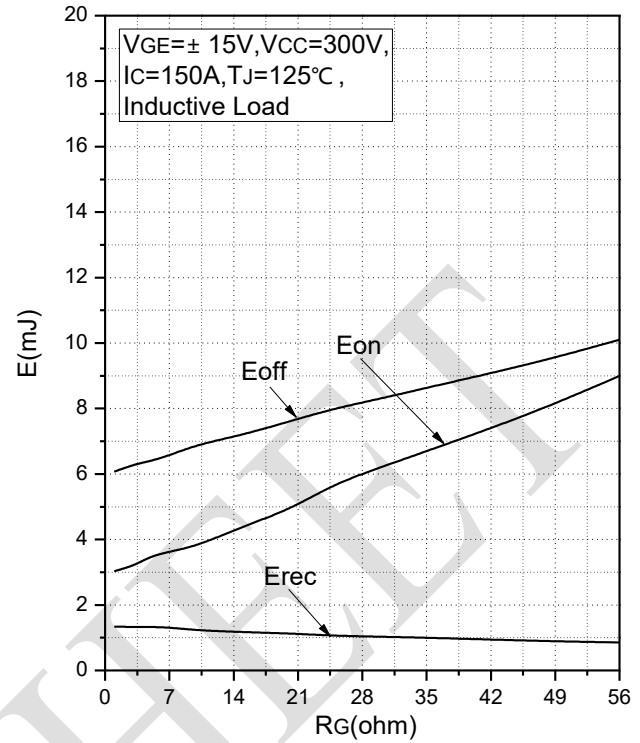


Fig.6 Typical Switching Loss vs. Gate Resistance

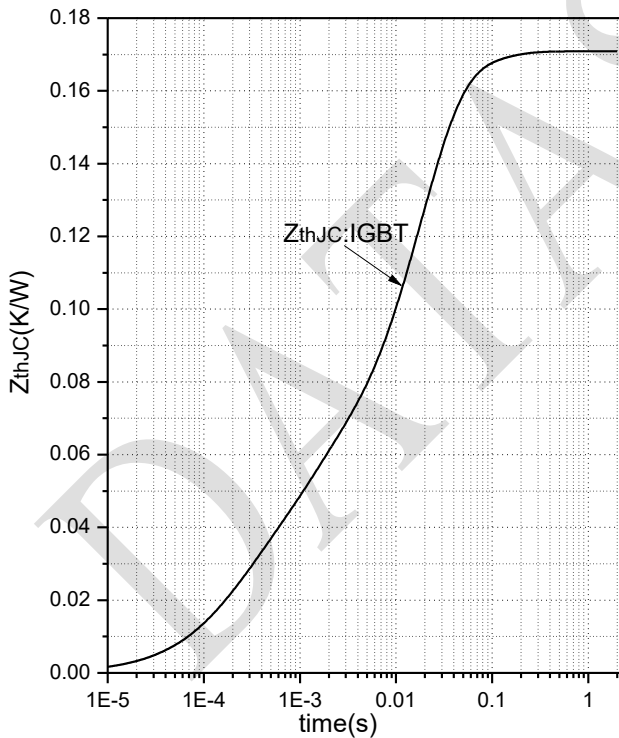


Fig.7 Transient Thermal Impedance (IGBT)

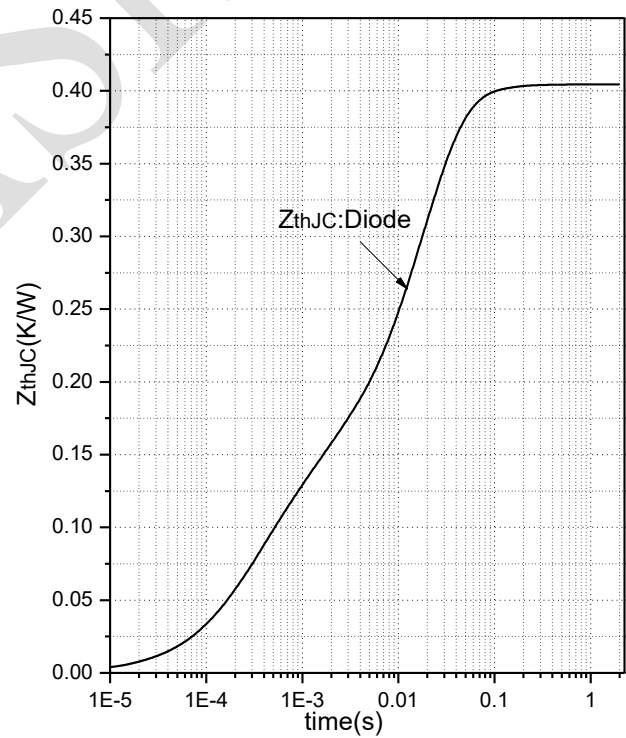


Fig.8 Transient Thermal Impedance (Diode)

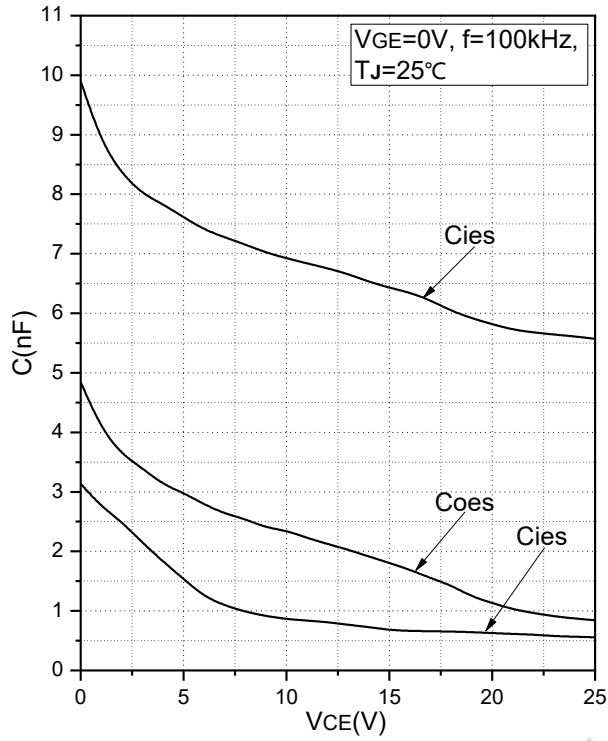


Fig.9 Capacitance Characteristics


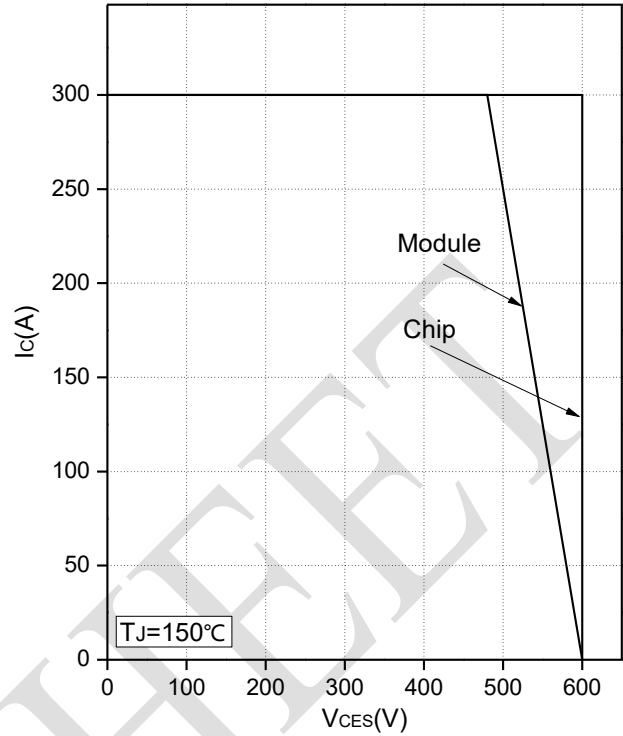


Fig.10 Reverse Bias Safe Operation Area (RBSOA)


DATA SHEET



Internal Circuit

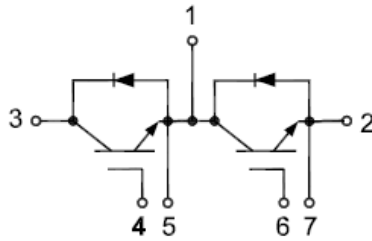

Package Outline (Unit: mm):

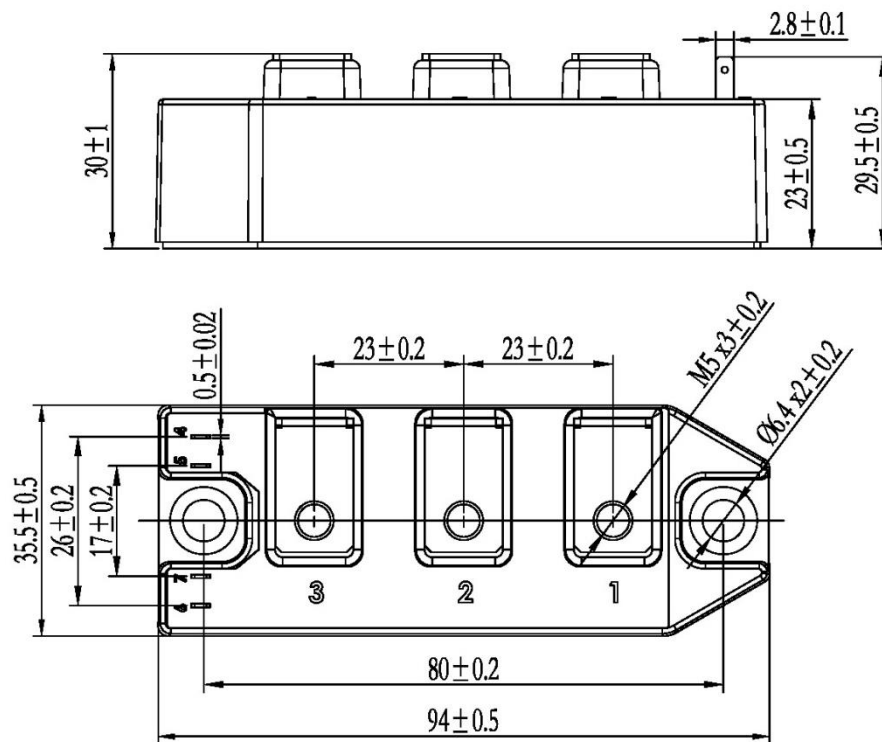



Date	Revision	Notes
12/13/2022	A	Final Version

Announcement

Information in this document is believed to be accurate and reliable. However, NJSME does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to Make Changes

NJSME reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

The datasheet with “REV.” + “Arabic numerals” is based on engineering data for initial reference purpose only.

The released datasheet would be issued with “REV.” + “alphabet characters”.

DATA SHEET