




GT100HF120T1VH

IGBT Module

Features:

- Field Stop Trench Gate IGBT
- Short Circuit Rated > 10 μ s
- Low Saturation Voltage
- Low Switching Loss
- 100% RBSOA Tested (2xI_c)
- Low Stray Inductance
- Lead Free, Compliant with RoHS Requirement

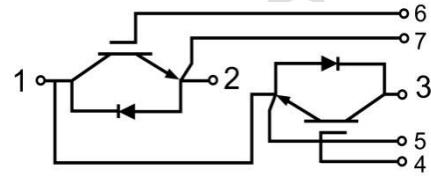

Applications:

- Industrial Inverters
- Servo Applications
- EV and EHV
- Induction Heating

Maximum Rated Values of IGBT (T_C=25°C unless otherwise specified)

V _{CES}	Collector-Emitter Blocking Voltage		1200	V
V _{GES}	Gate-Emitter Voltage		±20	V
I _c	Continuous Collector Current	T _C =100°C	100	A
		T _C =25°C	180	A
I _{CM}	Repetitive Peak Collector Current	T _J =175°C	200	A
t _{SC}	Short Circuit Withstand Time		>10	μs
P _D	Maximum Power Dissipation per leg	T _C =25°C T _{Jmax} =175°C	720	W



Electrical Characteristics of IGBT ($T_C=25^\circ\text{C}$ unless otherwise specified)

Static Characteristics

Symbol	Description	Conditions	Min.	Typ.	Max.	Units
$V_{GE(th)}$	Gate-Emitter Threshold Voltage	$I_C=4\text{mA}$, $V_{CE}=V_{GE}$	5.0	6.0	6.8	V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=100\text{A}$, $V_{GE}=15\text{V}$	$T_J=25^\circ\text{C}$	2.00	2.20	V
			$T_J=125^\circ\text{C}$	2.40		V
			$T_J=150^\circ\text{C}$	2.50		V
I_{CES}	Collector-Emitter Leakage Current	$V_{GE}=0\text{V}$, $V_{CE}=V_{CES}$, $T_J=25^\circ\text{C}$			1	mA
I_{GES}	Gate-Emitter Leakage Current	$V_{GE}=\pm 20\text{V}$, $V_{CE}=0\text{V}$, $T_J=25^\circ\text{C}$			200	nA
C_{ies}	Input Capacitance	$V_{CE}=25\text{V}$, $V_{GE}=0\text{V}$, $f=100\text{kHz}$		9.20		nF
C_{oes}	Output Capacitance			0.57		
C_{res}	Reverse Transfer Capacitance			0.08		

Switching Characteristics

Symbol	Description	Conditions	Min.	Typ.	Max.	Units	
$t_{d(on)}$	Turn-on Delay Time	$V_{CC}=600\text{V}$, $I_C=100\text{A}$, $R_{Gon}=6.8\Omega$, $V_{GE}=\pm 15\text{V}$, Inductive Load	$T_J=25^\circ\text{C}$		303		ns
			$T_J=125^\circ\text{C}$		305		
			$T_J=150^\circ\text{C}$		303		
t_r	Rise Time		$T_J=25^\circ\text{C}$		85		ns
			$T_J=125^\circ\text{C}$		90		
			$T_J=150^\circ\text{C}$		95		
$t_{d(off)}$	Turn-off Delay Time	$V_{CC}=600\text{V}$, $I_C=100\text{A}$, $R_{Goff}=6.8\Omega$, $V_{GE}=\pm 15\text{V}$, Inductive Load	$T_J=25^\circ\text{C}$		213		ns
			$T_J=125^\circ\text{C}$		203		
			$T_J=150^\circ\text{C}$		211		
t_f	Fall Time		$T_J=25^\circ\text{C}$		153		ns
			$T_J=125^\circ\text{C}$		185		
			$T_J=150^\circ\text{C}$		193		
E_{on}	Turn-on Switching Loss	$V_{CC}=600\text{V}$, $I_C=100\text{A}$, $R_{Gon}=6.8\Omega$, $V_{GE}=\pm 15\text{V}$, $di/dt=930\text{A}/\mu\text{s}$ ($T_J=150^\circ\text{C}$), Inductive Load	$T_J=25^\circ\text{C}$	5.3		mJ	
			$T_J=125^\circ\text{C}$	6.6			
			$T_J=150^\circ\text{C}$	7.8			



E _{off}	Turn-off Switching Loss	V _{CC} =600V, I _C =100A, R _{Goff} =6.8Ω, V _{GE} =±15V, du/dt=6675V/μs (T _J =150°C), Inductive Load	T _J =25°C	4.9	mJ
			T _J =125°C	6.1	
			T _J =150°C	7.3	
Q _g	Total Gate Charge	V _{GE} =+15V...-15V	T _J =25°C	451	nC
R _{g internal}	Internal Gate Resistance		T _J =25°C	7.5	Ω
RBSOA	Reverse Bias Safe Operation Area	I _C =200A, V _{CC} =1050V, V _p =1200V, R _G =6.8Ω, V _{GE} =+15V to 0V, T _J =150°C	Trapezoid		
SC Data	V _{CC} =600V, t _p =10us, V _{GE} =±15V, R _{Gon} =6.8ohm, R _{Goff} =6.8ohm, T _J =150°C		500	A	
R _{θJC}	IGBT Thermal Resistance: Junction-to-Case			0.208	°C/W

Maximum Rated Values of Diode (T_C=25°C unless otherwise specified)

V _{RRM}	Repetitive Peak Reverse Voltage	1200	V
I _F	Diode Continuous Forward Current	100	A
I _{FM}	Diode Maximum Forward Current	200	A

Electrical Characteristics of Diode (T_C=25°C unless otherwise specified)

Symbol	Description	Conditions	Min.	Typ.	Max.	Units
V _{FM}	Forward Voltage	I _F =100A	T _J =25°C	2.10		V
			T _J =125°C	2.30		
			T _J =150°C	2.20		
t _{rr}	Reverse Recovery Time	I _F =100A, -diF/dt=1345A/μs (T _J =150°C), V _{rr} =600V, V _{GE} =-15V	T _J =25°C	253		ns
			T _J =125°C	374		
			T _J =150°C	215		
I _{rr}	Peak Reverse Recovery Current	I _F =100A, -diF/dt=1345A/μs (T _J =150°C), V _{rr} =600V, V _{GE} =-15V	T _J =25°C	70		A
			T _J =125°C	78		
			T _J =150°C	78		
Q _{rr}	Reverse Recovery Charge	I _F =100A, -diF/dt=1345A/μs (T _J =150°C), V _{rr} =600V, V _{GE} =-15V	T _J =25°C	7.95		μC
			T _J =125°C	11.99		
			T _J =150°C	10.96		



E _{rec}	Reverse Recovery Energy	I _F =100A -diF/dt=1345A/μs(T _J =150°C), V _{rr} =600V, V _{GE} =-15V	T _J =25°C	3.4	mJ
			T _J =125°C	5.0	
			T _J =150°C	6.4	
R _{θJC}	Diode Thermal Resistance: Junction-to-Case			0.411	°C/W

Module

Symbol	Description	Min.	Typ.	Max.	Units
V _{iso}	Isolation Voltage (All Terminals Shorted)	f =50Hz, 1minute	2500		V
L _{sCE}	Stray Inductance Module		30		nH
T _J	Maximum Junction Temperature			175	°C
T _{JOP}	Maximum Operating Junction Temperature Range	-40		+150	°C
T _{stg}	Storage Temperature	-40		+125	°C
CTI	Comparative Tracking Index	200			
R _{θCS}	Case-to-Sink Thermally (Conductive Grease Applied)			0.07	°C/W
T	Power Terminals Screw:M5	3.0		5.0	N·m
T	Mounting Screw:M6	4.0		6.0	N·m
G	Weight		165		g

Ordering Information Table

Device code	G	T	100	HF	120	T1V	H
	①	②	③	④	⑤	⑥	⑦

- ① - IGBT Module
- ② - Trench, Low Switching Losses IGBT
- ③ - Rated Current (100=100A)
- ④ - Circuit Configuration: HF(Half Bridge)
- ⑤ - Rated Voltage (120=1200V)
- ⑥ - Package Type
- ⑦ - Test Level (Pass the Important Reliability Test-Industrial Grade)

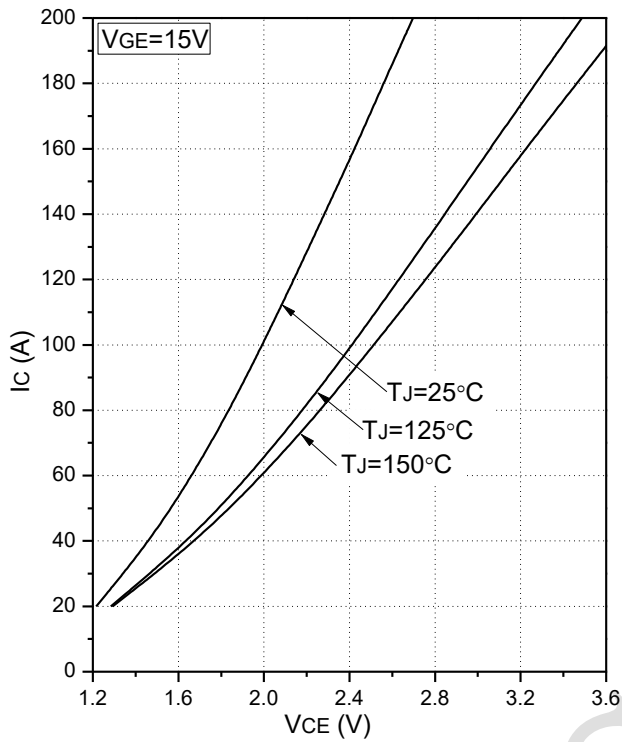


Fig.1 Typical Saturation Voltage Characteristics

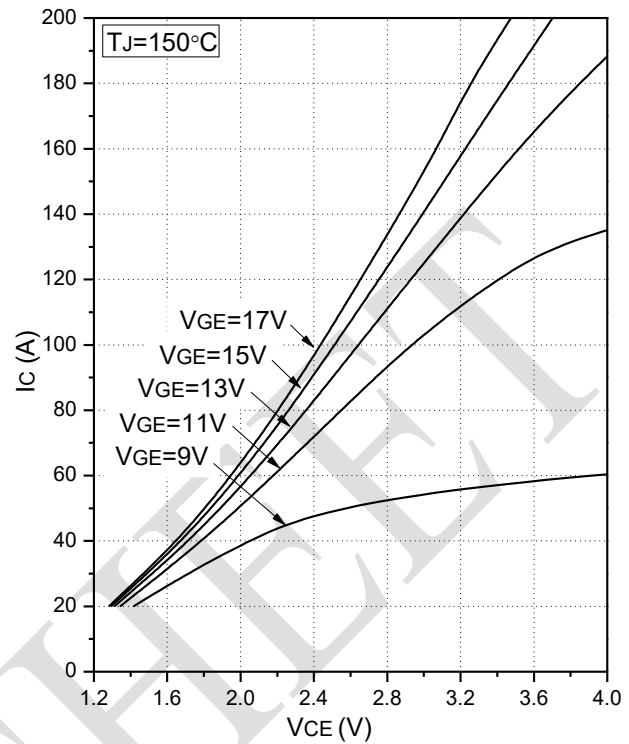


Fig.2 Typical Output Characteristics

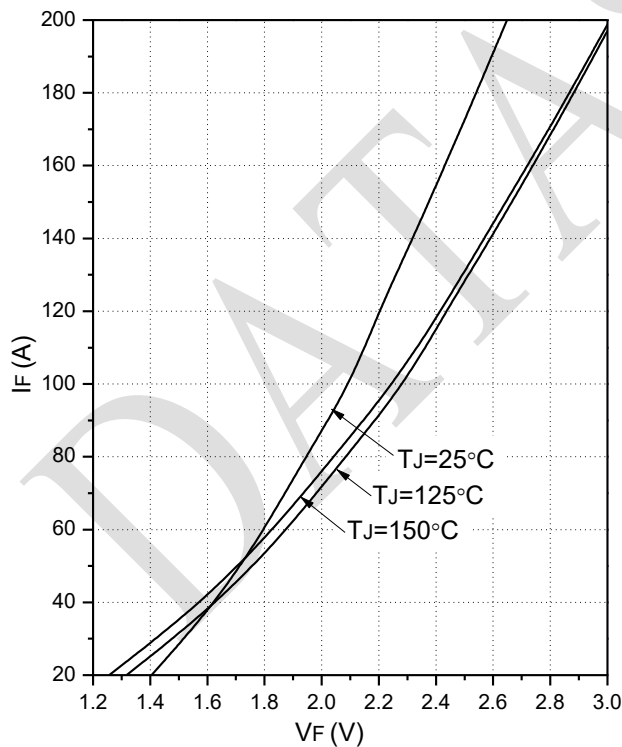


Fig.3 Forward Characteristics of Diode

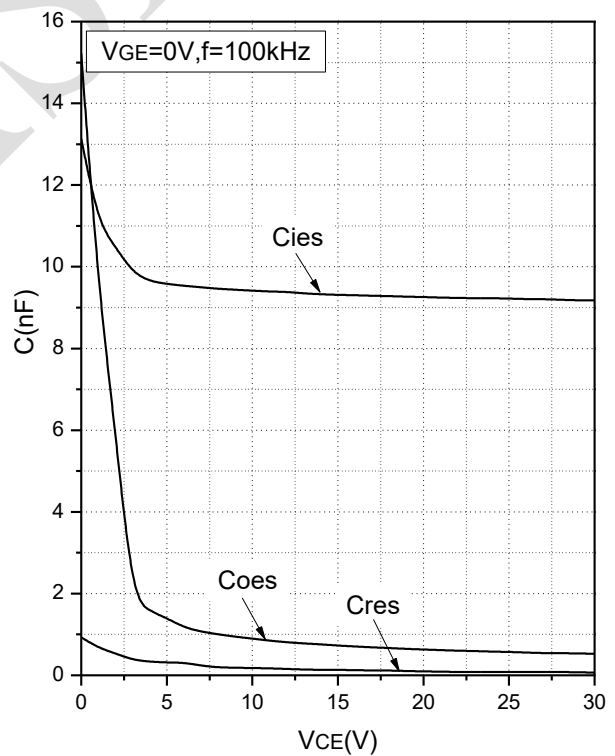


Fig.4 Capacitance Characteristics

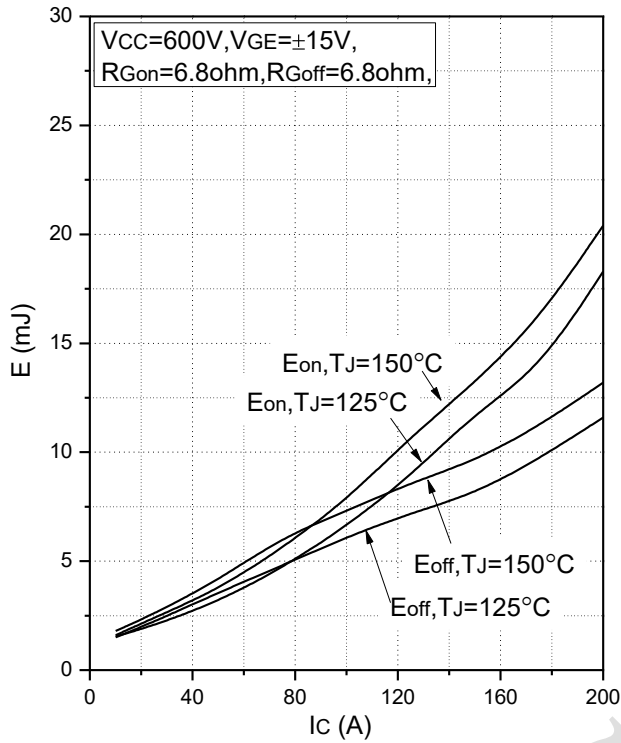


Fig. 5 Typical Switching Loss vs. Collector Current

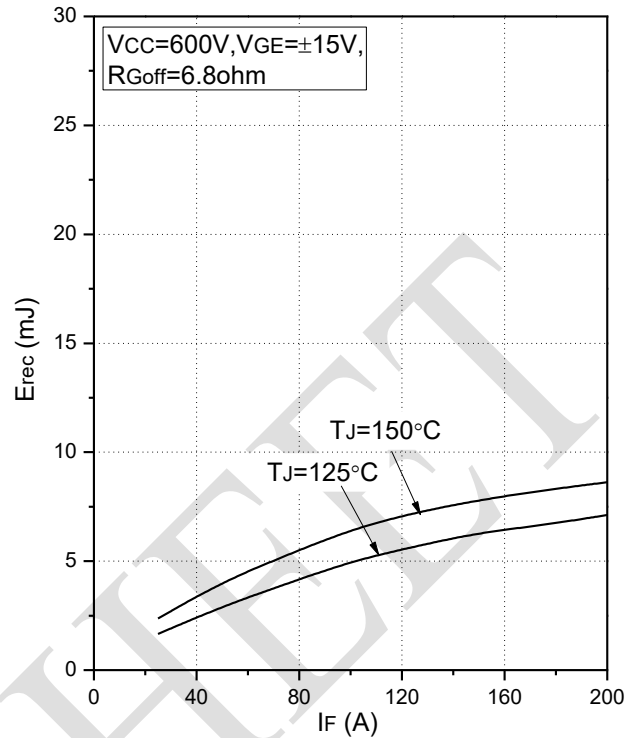


Fig. 6 Typical Switching Loss vs. Forward Current

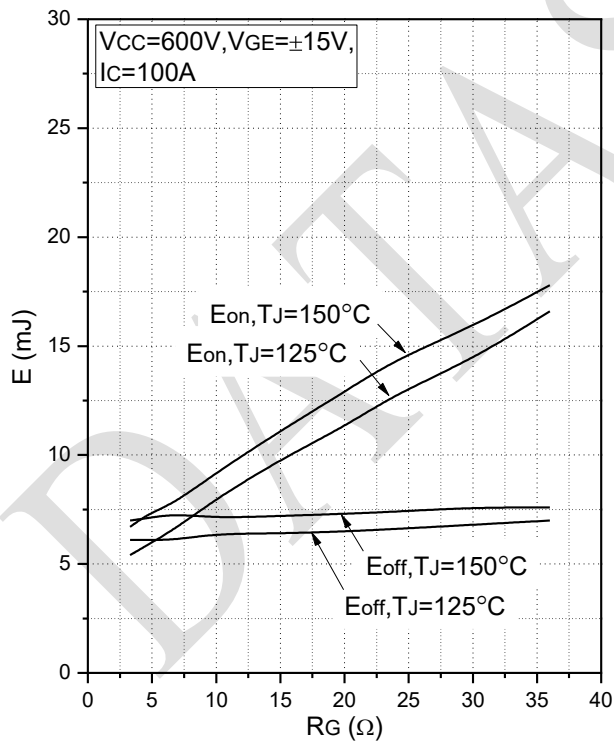


Fig. 7 Typical Switching Loss vs. Gate Resistance

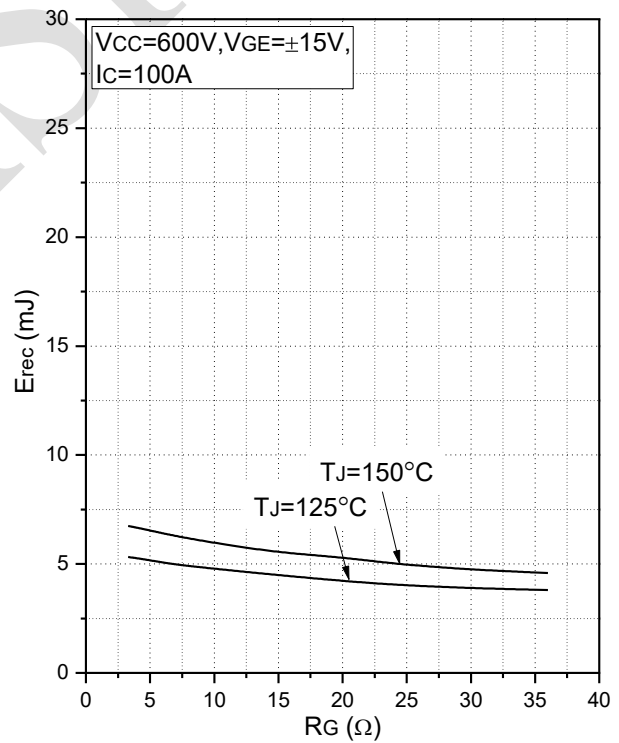


Fig. 8 Typical Switching Loss vs. Gate Resistance

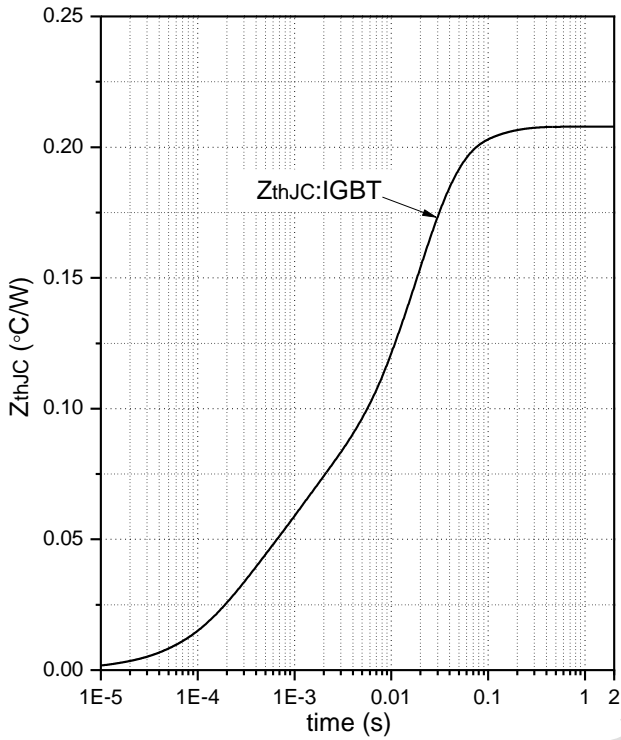


Fig.9 Transient Thermal Impedance (IGBT)

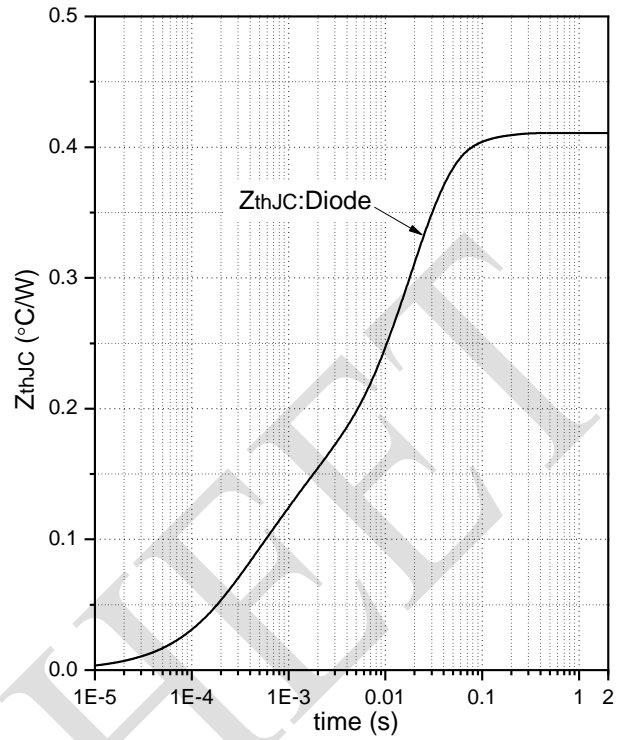


Fig.10 Transient Thermal Impedance (Diode)


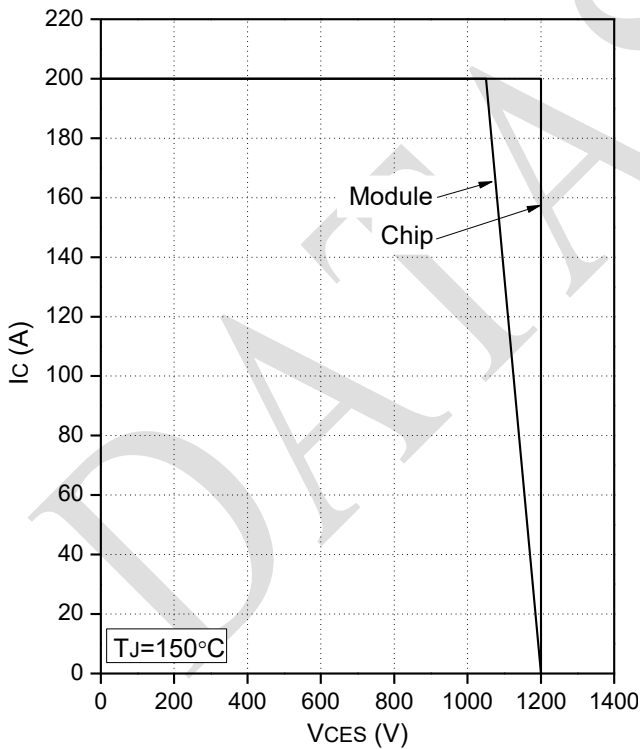




Fig.11 Reverse Bias Safe Operation Area (RBSOA)



Internal Circuit

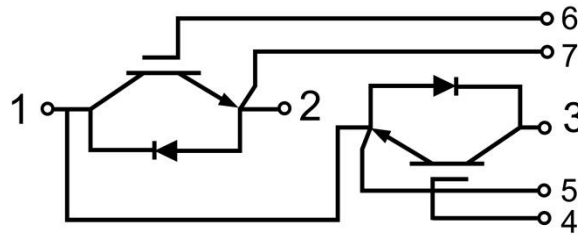

Package Outline (Unit: mm):

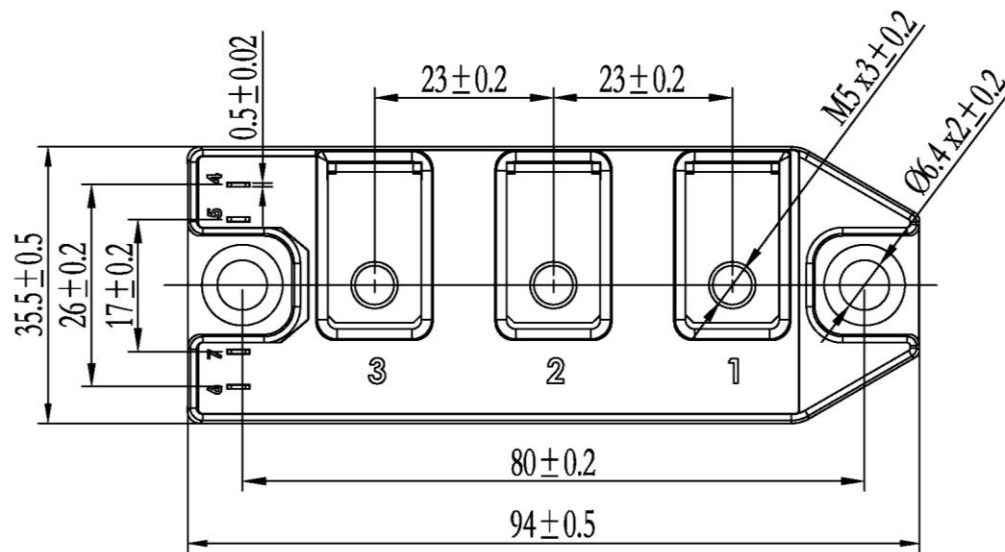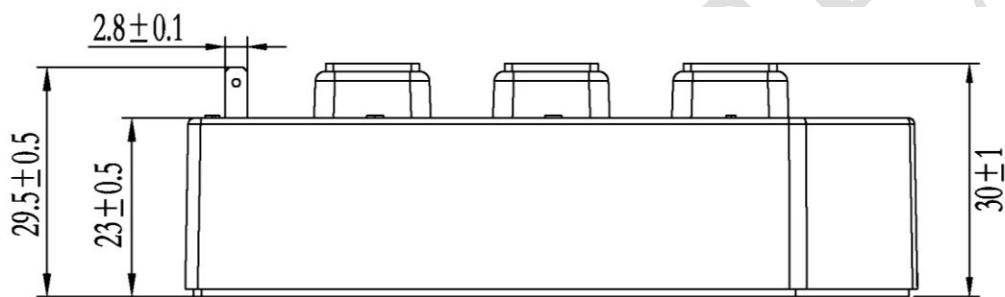



Date	Revision	Notes
03/04/2022	A	Final Version

Announcements

Information in this document is believed to be accurate and reliable. However, NJSME does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to Make Changes

NJSME reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

The datasheet with “REV.” + “Arabic numerals” is based on engineering data for initial reference purpose only.

The released datasheet would be issued with “REV.” + “alphabet characters”.