

for Automotive Electronics

SPECIFICATIONS

Customer	
Product Name	Wire Wound Common Mode Choke Coil
Sunlord Part Number	AMCW2012S
Customer Part Number	

New Released, Revised

SPEC No.: **AMCW02220000**

【This SPEC is total 14 pages.】

【ROHS Compliant Parts】

Approved By	Checked By	Issued By

Shenzhen Sunlord Electronics Co., Ltd.

Address: Sunlord Industrial Park, Dafuyuan Industrial Zone, Baoan, Shenzhen, China 518110
Tel: 0086-755-29832333 Fax: 0086-755-82269029 E-Mail: sunlord@sunlordinc.com

【For Customer approval Only】

Date: _____

Qualification Status: Full Restricted Rejected

Approved By	Verified By	Re-checked By	Checked By

Comments:

Version Change History

Rev.	Date	Item	Changed Contents	Change Reasons	Drawing	Check	Approval
01	/	/	New release	/	XingYi Gong	/	Lang Yu

for Automotive Electronics

〈Content〉

No.	Item	Page
1	Scope	4
2	Product Description and Identification (Part Number)	4
3	Electrical Characteristics	4
4	Shape and Dimensions	5
5	Test and Measurement Procedures	5~6
6	Reliability Test	6~8
7	Packaging and Storage	8~10
8	Warning and Attentions	10~11
9	Visual inspection Standard of Product	11~12
10	Recommended Soldering Technologies	12
11	Solder Volume	12~13
12	Circuit Design	13
13	Cleaning	13
14	Precautions	13~14

1 Scope

1.1 Scope of parts

This specification applies to the AMCW2012S Series of wire wound common mode choke coil for automotive electronics based on AEC-Q200.

1.2 Scope of application

Product numbers recorded in this specification are limited to applications with the following modules:

- (1) Infotainment System.
- (2) Prohibit using in Engine Control System.

2 Product Description and Identification (Part Number)

1) Description:

AMCW2012S series of Wire wound Common Mode Choke Coil.

2) Product Identification (Part Number)



① Type	
AMCW	Wire Wound Chip Common Mode Choke for Automotive

② External Dimensions [L X W] (mm)	
2012	2.0 X 1.2

③ Type Code	
S	Signal

④ Number of Lines	
2	2 lines

⑤ Nominal Impedance (Ω)	
Example	Nominal Value
670	67
900	90
121	120
181	180
361	360
481	480

⑥ Packing	
T	Tape & Reel


3 Electrical Characteristics

Part Number	Impedance @ 100MHz (Ω)	DC Resistance (Ω) Max.	Rated Current (mA) Max.	Rated Voltage (VDC)	Insulation Resistance (MΩ) Min.	Operating Temperature Range
AMCW2012S-2-670T	67 ± 25%	0.18	420	50	10	-40 to +125°C
AMCW2012S-2-900T	90 ± 25%	0.22	400	50	10	-40 to +125°C
AMCW2012S-2-121T	120 ± 25%	0.22	400	50	10	-40 to +125°C
AMCW2012S-2-181T	180 ± 25%	0.28	350	50	10	-40 to +125°C
AMCW2012S-2-361T	360 ± 25%	0.39	280	50	10	-40 to +125°C
AMCW2012S-2-481T	480 ± 25%	0.37	290	50	10	-40 to +125°C

3.1 Storage temperature range (packaging conditions): -10°C~+40°C and RH 70% (Max.)

3.2 Typical Electrical Characteristics

Impedance vs. Frequency

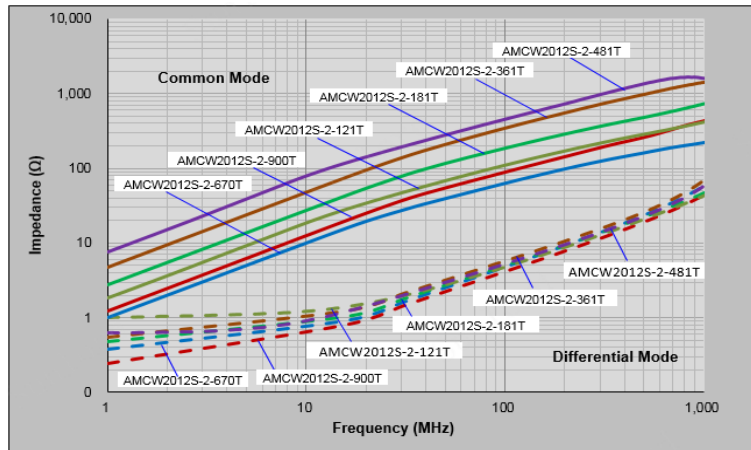

4 Shape and Dimensions

4.1 Structures: See Fig.4-1, Fig.4-2 and Table 4-1.




Fig.4-1




Fig.4-2

[Table 4-1]

No.	Part Name	Material Name
①	Lid	Ni-Zn Ferrite
②	Epoxy	Epoxy resin
③	Wire	Polyurethane system enameled copper wire
④	Core	Ni-Zn Ferrite
⑤	Electrode structure	Ag+Ni+Sn plating

4.2 Dimensions: See Fig. 4-3.

4.3 Equivalent circuit: See Fig. 4-4.

4.4 Recommended PCB pattern for reflow soldering: See Fig. 4-5.

4.5 Electrode Coplanarity:0.1mm Max.

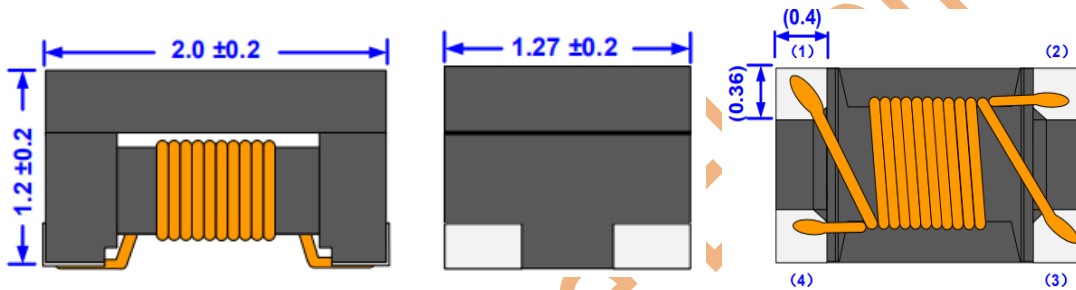


Fig.4-3 (Unit:mm)

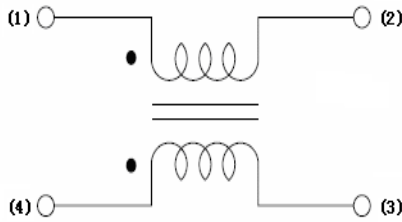


Fig.4-4




Fig.4-5 (Unit: mm)

5 Test and Measurement Procedures

5.1 Test Conditions

5.1.1 Unless otherwise specified, the standard atmospheric conditions for measurement/test as:

- a. Ambient Temperature: 20±15°C
- b. Relative Humidity: 65±20%
- c. Air Pressure: 86kPa to 106kPa




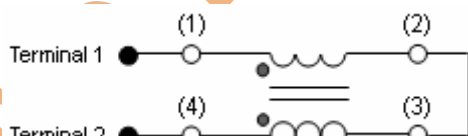
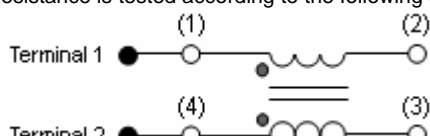
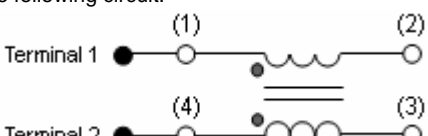
5.1.2 If any doubt on the results, measurements/tests should be made within the following limits:

- a. Ambient Temperature: 20±2°C
- b. Relative Humidity: 65±5%
- c. Air Pressure: 86kPa to 106kPa


5.2 Visual Examination





Inspection Equipment: 10X microscope

5.3 Electrical Test

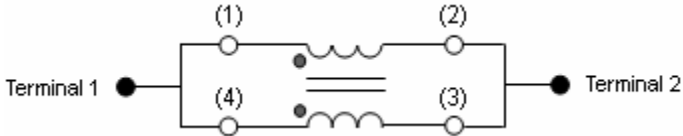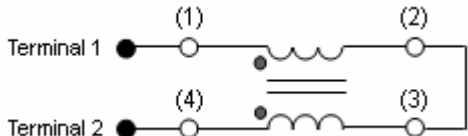Items	Requirements	Test Methods and Remarks
5.3.1 Impedance (Common Mode)	Refer to item 3. Electrical Characteristics	Test equipment: High Accuracy RF LCR Meter Agilent4287A/E4991A or equivalent. Common Mode Impedance is tested according to the following circuit. 
5.3.2 Impedance (Differential Mode)	Refer to item 3. Electrical Characteristics	Test equipment: High Accuracy RF LCR Meter Agilent4287A/E4991A or equivalent. Differential Mode Impedance is tested according to the following circuit. 
5.3.3 DC Resistance	Refer to item 3. Electrical Characteristics	Test equipment: High Accuracy Milliohm meter Agilent4338B/34420 or equivalent. DC Resistance is tested according to the following circuit. 
5.3.4 Rated Current	Refer to item 3. Electrical Characteristics	Test equipment: Electric Power, Electric current meter, Thermometer. Definition of Rated Current (I _r): I _r is direct electric current as chip surface temperature rise just 20°C against chip initial surface temperature. Rated Current is tested according to the following circuit. 
5.3.5 Insulation Resistance	Refer to item 3. Electrical Characteristics	Test equipment: High resistance meter Agilent4339B. Insulation Resistance is tested according to the following circuit. 
5.3.6 Dielectric Strength	Refer to item 3. Electrical Characteristics	2.5 times Rated Voltage shall be applied between two coils for 1 minute and there shall be no dielectric breakdown (IR meet the specification). Dielectric Strength is tested according to the following circuit. 

6 Reliability Test

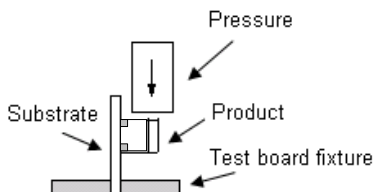Item	Requirements	Test Methods and Remarks
6.1 Terminal strength	No removal or split of the termination or other defects shall occur. 	<ol style="list-style-type: none"> ① Solder the chip to the testing jig (glass epoxy board) using eutectic solder. Then apply a force in the direction of the arrow. ② 5 N force. ③ Keep time: 60(+1) sec.
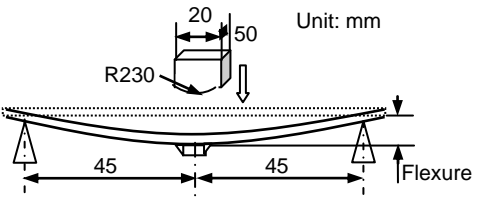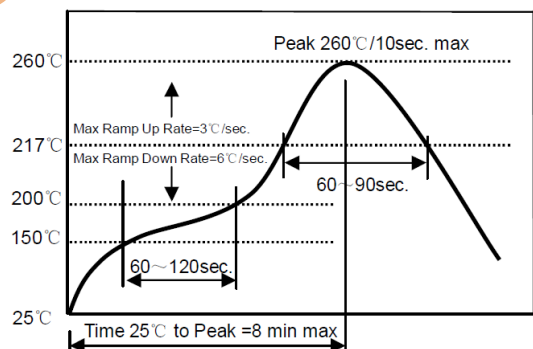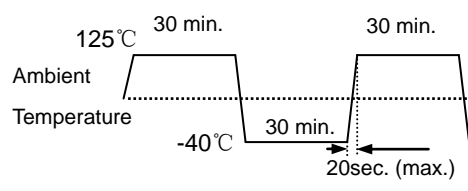
<p>6.2 Resistance to Flexure</p>	<p>① No visible mechanical damage. ② Inductance change: within $\pm 20\%$. ③ Insulation resistance: 10MΩ Min.</p> 	<p>① Solder the chip to the test jig (glass epoxy board) using a eutectic solder. Then apply a force in the direction shown as left. ② Flexure: 2mm. ③ Pressurizing speed: 0.5mm/sec. ④ Keep time: 60(+5) sec.</p>
<p>6.3 Vibration</p>	<p>① No visible mechanical damage. ② Inductance change: within $\pm 20\%$. ③ Insulation resistance: 10MΩ Min.</p> 	<p>① Solder the chip to the testing jig (glass epoxy board) using eutectic solder. ② The chip shall be subjected to a simple harmonic motion having total amplitude of 1.5mm, the vibration acceleration of 5g, the frequency being varied uniformly between the approximate limits of 10 and 2000 Hz. ③ The frequency range from 10 to 2000 Hz and return to 10 Hz shall be traversed in approximately 20 minute. This motion shall be applied for a period of 4 hours in each 3 mutually directions (total of 12 hours).</p>
<p>6.4 Solderability</p>	<p>① Wetting shall be exceeded 90% coverage, except welding points.</p>	<p>① Steam aging 8h (pretreatment). ② Solder temperature: 260$\pm 2^\circ\text{C}$. ③ Duration: 4± 1sec. ④ Solder: Sn/3.0Ag/0.5Cu. ⑤ Flux: 25% resin and 75% ethanol in weight.</p>
<p>6.5 Resistance to soldering heat</p>	<p>① No visible mechanical damage. ② Inductance change: within $\pm 20\%$. ③ Insulation resistance: 10MΩ Min.</p>	<p>① Reflow soldering ② The chip shall be stabilized at normal condition for 1-2 hours before measuring.</p> 
<p>6.6 Temperature Characteristics</p>	<p>① No visible mechanical damage. ② Inductance change: within $\pm 20\%$. ③ Insulation resistance: 10MΩ Min.</p>	<p>① Temperature range: -40$^\circ\text{C}$~+125$^\circ\text{C}$. ② Reference temperature: +20$^\circ\text{C}$.</p>
<p>6.7 Thermal shock</p>	<p>① No mechanical damage. ② Inductance change: within $\pm 20\%$. ③ Insulation resistance: 10MΩ Min.</p> 	<p>① Temperature, time: -40$^\circ\text{C}$ for 30± 3 min \rightarrow 125$^\circ\text{C}$ for 30± 3 min. ② Transforming interval: 20 sec (max.). ③ Tested cycle: 1000 cycles. ④ The chip shall be stabilized at normal condition for 1-2 hours before measuring.</p>
<p>6.8 Resistance to low temperature</p>	<p>① No mechanical damage. ② Inductance change: within $\pm 20\%$. ③ Insulation resistance: 10MΩ Min.</p>	<p>① Temperature: -40$\pm 2^\circ\text{C}$ ② Duration: 1000⁺²⁴ hours. ③ The chip shall be stabilized at normal condition for 1-2 hours before measuring.</p>

6.9 Resistance to high temperature	① No mechanical damage. ② Inductance change: within $\pm 20\%$. ③ Insulation resistance: 10M Ω Min.	① Temperature: 125 $\pm 2^\circ\text{C}$ ② Duration: 1000 ⁺²⁴ hours. ③ The chip shall be stabilized at normal condition for 1~2 hours before measuring.
6.10 Damp heat (Steady states)	① No visible mechanical damage. ② Inductance change: within $\pm 20\%$. ③ Insulation resistance: 10M Ω Min.	① Temperature: 60 $\pm 2^\circ\text{C}$. ② Humidity: 90% to 95% RH. ③ Duration: 1000 ⁺²⁴ hours. ④ The chip shall be stabilized at normal condition for 1~2 hours before measuring.
6.11 Loading under damp heat	① No visible mechanical damage. ② Inductance change: within $\pm 20\%$. ③ Insulation resistance: 10M Ω Min.	① Temperature: 60 $\pm 2^\circ\text{C}$. ② Humidity: 90% to 95% RH. ③ Duration: 1000 ⁺²⁴ hours. ④ Applied current: Rated current. ⑤ The chip shall be stabilized at normal condition for 1~2 hours before measuring.
6.12 Loading at high temperature (Life test)	① No visible mechanical damage. ② Inductance change: within $\pm 20\%$. ③ Insulation resistance: 10M Ω Min.	① Temperature: 125 $\pm 2^\circ\text{C}$. ② Duration: 1000 ⁺²⁴ hours. ③ Applied current: Rated current. ④ The chip shall be stabilized at normal condition for 1~2 hours before measuring.
6.13 Mechanical Shock	① No visible mechanical damage. ② Inductance change: within $\pm 20\%$. ③ Insulation resistance: 10M Ω Min.	① Half sinusoid, the peak acceleration: 1500g. ② Pulse width: 0.5 ms. ③ This motion shall be applied for 6 times in each 3 mutually directions (total of 18 times).
6.14 ESD	① No visible mechanical damage. ② Inductance change: within $\pm 20\%$. ③ Insulation resistance: 10M Ω Min.	Contact discharge, 8 KV, twice, one in the positive polarity and the other in the negative polarity.
6.15 Steady Temperature -Humidity -Bias Life Test	① No visible mechanical damage. ② Inductance change: within $\pm 20\%$. ③ Insulation resistance: 10M Ω Min.	① Temperature: 85 $\pm 2^\circ\text{C}$. ② Humidity: 85% RH. ③ Duration: 1000 ⁺²⁴ hours. ④ Applied current: Rated current. ⑤ The chip shall be stabilized at normal condition for 1~2 hours before measuring.
6.16 Moisture Resistance	① No visible mechanical damage. ② Inductance change: within $\pm 20\%$. ③ Insulation resistance: 10M Ω Min.	① 25 $^\circ\text{C}$ \rightarrow 65 $^\circ\text{C}$, 90%~100%RH, 2.5h. ② 65 $^\circ\text{C}$, 90%~100%RH, 3h. ③ 65 $^\circ\text{C}$ \rightarrow 25 $^\circ\text{C}$, 80%~100%RH, 2.5h. ④ 25 $^\circ\text{C}$ \rightarrow 65 $^\circ\text{C}$, 90%~100%RH, 2.5h. ⑤ 65 $^\circ\text{C}$, 90%~100%RH, 3h. ⑥ 65 $^\circ\text{C}$ \rightarrow 25 $^\circ\text{C}$, 80%~100%RH, 2.5h. ⑦ 25 $^\circ\text{C}$, 90%~100%RH, 8h, 24hours of 1cycle. ⑧ Tested cycle: 10 cycles ⑨ The chip shall be stabilized at normal condition for 1~2 hours before measuring.

7 Packaging and Storage

7.1 Packaging

There is one type of packaging for the chip chokes. Please specify the packing code when ordering.

Tape Carrier Packaging:

Packaging code: T

- i. Tape carrier packaging are specified in attached figure Fig. 6.1-1~4
- ii. Tape carrier packaging quantity please see the following table:

Type	2012S
Tape	Embossed Tape
Quantity	2K

(1) Taping Drawings (Unit: mm)

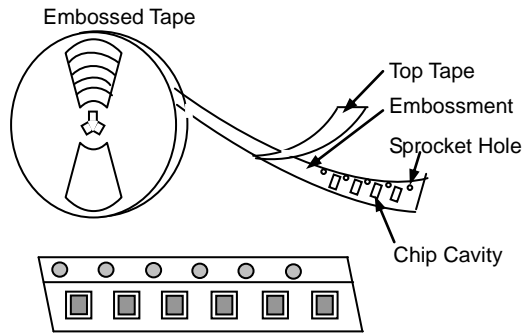


Fig. 6.1-1

Remark: The sprocket holes are to the right as the tape is pulled toward the user.

(2) Taping Dimensions (Unit: mm)

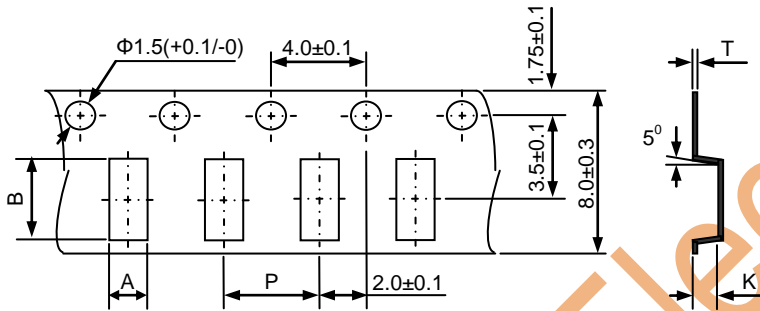


Fig. 6.1-2

Type	A	P	K	T
2012	1.55 ± 0.2	4.0 ± 0.1	1.45 ± 0.1	0.2 ± 0.1

(3) Leader and blank portion.

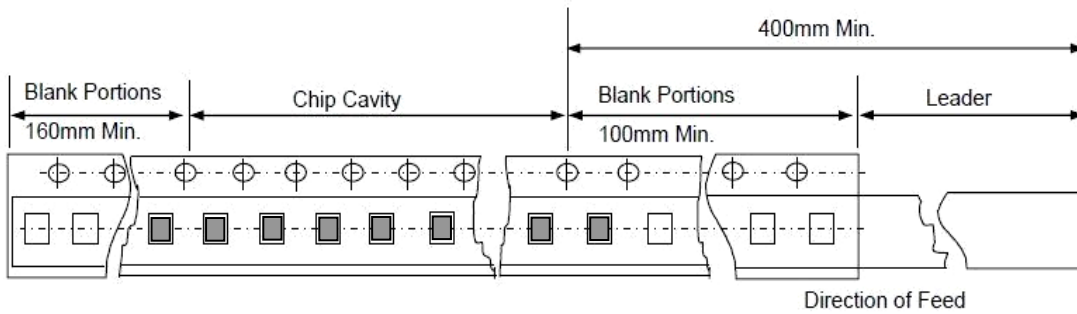


Fig. 6.1-3

(4) Reel Dimensions (Unit: mm)

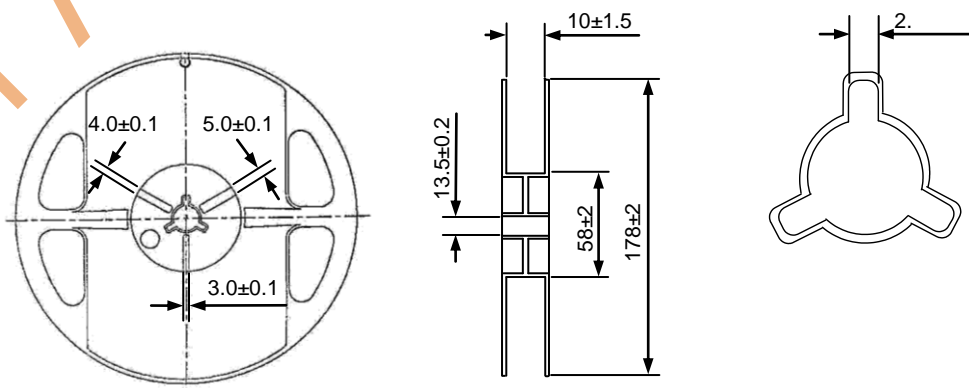


Fig. 6.1-4

(5) Peeling off force: 10gf to 70gf in the direction show below.

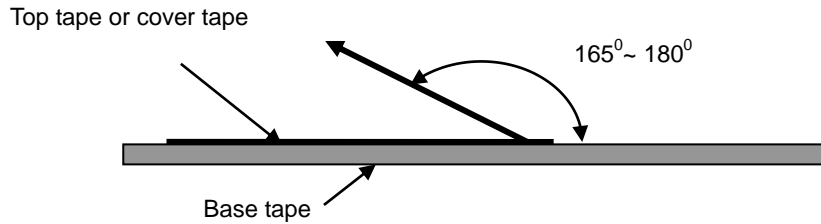


Fig. 6.1-5

7.2 Storage

- The solder ability of the external electrode may be deteriorated if packages are stored where they are exposed to high temperature or high humidity. Besides, to ensure packing material's good state, packages must be stored at -10°C to 40°C and 70% RH.
- The solder ability of the external electrode may be deteriorated if packages are stored where they are exposed to dust or harmful gas (e.g. HCl, sulfurous gas of H₂S).
- Packaging materials may deform if packages are exposed directly to sunlight.
- Minimum packages, such as polyvinyl heat-seal packages shall not be opened until they are used. If opened, use the reels as soon as possible.
- Solderability shall be guaranteed for 12 months from the date of delivery on condition that they are stored at the environment specified in specification. For those parts, which passed more than the time shall be checked solder-ability before use.

7.3 Transportation

The cases shall not be damaged, destroyed and rained on.

8 Warning and Attention

8.1 General Handling Precautions

- Handling
 - Always wear static control bands to protect against ESD.
 - Any devices used (soldering iron, measuring instruments) should be properly grounded.
 - Use non-magnetic tweezers when handling the chips.
- Breakaway PC boards (splitting along perforations)
 - When splitting the PCB after mounting product, care should be taken not to give any stresses of deflection or twisting to the board.
 - Board separation should not be done manually, but by using the appropriate devices.
- Mechanical considerations
 - Please do not give the product any excessive mechanical shocks.
 - Please do not add any shock and power to a product in transportation.
- Pick-up pressure
 - Please do not push to add any pressure to a winding part; please do not give any shock and push into a ferrite core exposure part


8.2 Precautions on Use

- Always wear static control bands to protect against ESD.
- Any devices used (soldering iron, measuring instruments) should be properly grounded.
- Use non-magnetic tweezers when handling the chips.
- Pre-heating when soldering, and refer to the recommended condition specified in specification.
- Don't apply current in excess of the rated current value. It may cause damage to components due to over-current.
- Keep clear of anything that may generate magnetic fields such as speakers, coils.
- When soldering, the electrical characteristics (such as impedance) may be varied due to hot energy and mechanical stress.
- When coating products with resin, the relatively high resin curing stress may change the electrical characteristics. For exterior coating, select resin carefully so that electrical and mechanical performance of the product is not affected. Before using, please evaluate reliability with the product mounted in your application set.
- When mount chips with adhesive in preliminary assembly, do appropriate check before the soldering stage, i.e., the size of land pattern, type of adhesive, amount applied, hardening of the adhesive on proper usage and amounts of adhesive to use.
- Mounting density: Add special attention to radiating heat of products when mounting other components nearby. The excessive heat by other products may cause deterioration at joint of this product with substrate.
- Since some products are constructed like an open magnetic circuit, narrow spacing between components may cause magnetic coupling.
- Please do not give the product any excessive mechanical shocks in transportation.
- Please do not touch wires by sharp terminals such as tweezers to avoid causing any damage to wires.
- Please do not add any shock and power to the soldered product to avoid causing any damage to chip body.
- Please do not touch the electrodes by naked hand as the solderability of the external electrodes may deteriorate by grease or oil on the skin.
- Please do not use the brush to clean product or its surroundings. If you use the brush to clean product or its surroundings on PCB, copper wire may be broke, causing the product open.

8.3 PCB Bending Design


The following shall be considered when designing and laying out PCB's.

- a. PCB shall be designed so that products are not subjected to the mechanical stress from board warp or deflection.

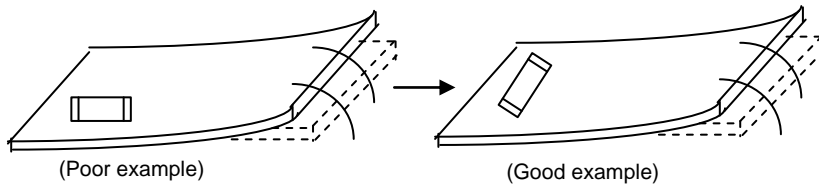

Products shall be located in the sideways direction to the mechanical stress.

- b. Products location on PCB separation.

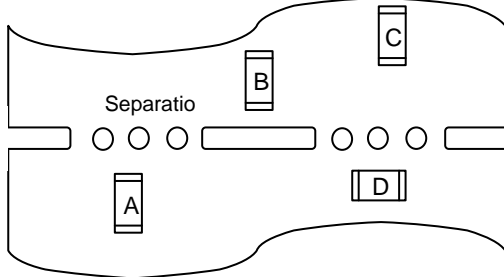

Product shall be located carefully because they may be subjected to the mechanical stress in order of $A > C = B > D$.

- c. When splitting the PCB board, or insert (remove) connector, or fasten thread after mounting components, care is required so as not to give any stress of deflection or twisting to the board. Because mechanical force may cause deterioration of the bonding strength of electrode and solder, even crack of product body. Board separation should not be done manually, but by using appropriate devices.

8.4 Recommended PCB Design for SMT Land-Patterns



When chips are mounted on a PCB, the amount of solder used (size of fillet) and the size of PCB Land-Patterns can directly affect chip performance. Therefore, the following items must be carefully considered in the design of solder land patterns.

- a. Please use the PCB pad and solder paste we recommend, and contact us in advance if they need to be changed.
- b. Please use flux contained with resin since the highly acidic (Chlorine content more than 0.2 wt%) or water-soluble one could damage the insulation film of wires, then causing short circuit of parts.
- c. The amount of solder applied can affect the ability of chips to withstand mechanical stresses which may lead to breaking or cracking. Therefore, when designing land-patterns it is necessary to consider the appropriate size and configuration of the solder pads which in turn determines the amount of solder necessary to form the fillets.
- d. When more than one part is jointly soldered onto the same land or pad, the pad must be designed that each component's soldering point is separated by solder-resist.

Recommended land dimensions please refer to product specification.

9 Visual inspection standard of product

File No:		Applied to Wire Wound Common Mode Choke Coil	
Effective date:			
No.	Defect Item	Graphic	Rejection identification
1	Cover defect		For 2012 size, $L \geq 0.33\text{mm}$, NG L : defect maximum length
2	Core defect		For 2012size, $L \geq 0.33\text{mm}$, NG L : defect maximum length

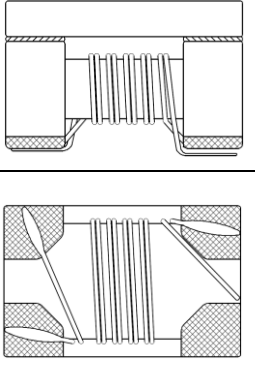
3	Cover skewing		$L \geq 0.27\text{mm}$, NG L : offset distance between cover and core
4	Wire off		The solder joint of wire break away from electrodes

10 Recommended Soldering Technologie

This product is only for reflow soldering and iron soldering.

10.1 Re-flowing Profile


- △ Preheat condition: 150~200°C/60~120sec.
- △ Allowed time above 217°C: 60~90sec.
- △ Peak temp: 245°C~260°C
- △ Max time at max temp: 10sec.
- △ Solder paste: Sn/3.0Ag/0.5Cu
- △ Allowed Reflow time: 3 times max.

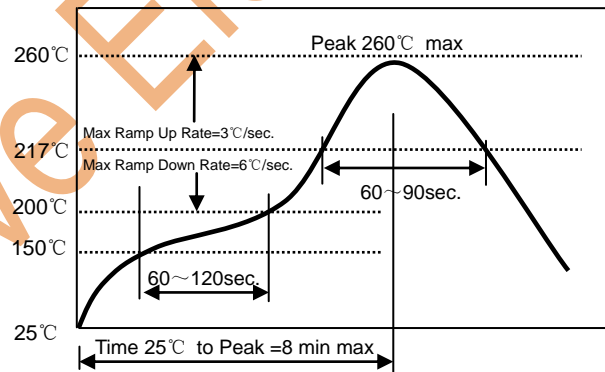

[Note: The reflow profile in the above table is only for qualification and is not meant to specify board assembly profiles. Actual board assembly profiles must be based on the customer's specific board design, solder paste and process, and should not exceed the parameters as the Reflow profile shows.]

10.2 Iron Soldering Profile

- △ Iron soldering power: 30W Max.
- △ Preheat condition: 150°C/60sec.
- △ Soldering tip temperature: 350°C Max.
- △ Soldering time: 3sec. Max.
- △ Solder paste: Sn/3.0Ag/0.5Cu
- △ Iron Soldering time: 1 time max.

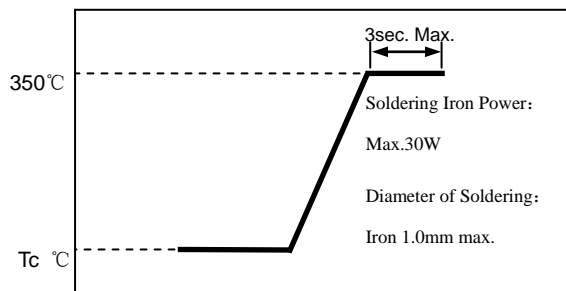

[Note: Take care not to apply the tip of the soldering iron to the terminal electrodes.]

10.3 Maintenance of heat gun (for your reference)

- △ Power output: 30W
- △ Temperature: 350°C Max
- △ Heat time: More than 5 seconds heating may cause short circuit of parts. And poor adhesive property of resin, meanwhile, the external force produced by heat gun could lead to separation between magnetic core and lid.

11 Solder Volume

- a. Accordingly increasing the solder volume, the mechanical stress to chip is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance.
- b. Before soldering, please ensure that the solder should not adhere to the wire part of chip.

- c. Please pay particular attention to whether there is flux remaining on surface of the wire part of chip after subjected to reflow soldering since this may causing short circuit of parts.

12 Circuit Design

Operating environment: The products described in this specification are intended for use in general electronic equipment,(office supply equipment, telecommunications systems, measuring equipment, and household equipment). They are not intended for use in mission-critical equipment or systems requiring special quality and high reliability (traffic systems, safety equipment, aerospace systems, nuclear control systems and medical equipment including life-support systems) where product failure might result in loss of life injury or damage. For such uses, contact Sunlord Sales Department in advance

13 Cleaning

Products shall be cleaned on the following conditions:

- a. Cleaning temperature shall be limited to 60°C Max. (40°C Max. for fluoride and alcohol type cleaner.)
- b. Ultrasonic cleaning shall comply with the following conditions, avoiding the resonance phenomenon at the mounted products and PCB.
 - Power: 20W/l Max.
 - Frequency: 28 KHz to 40 KHz
 - Time: 5 minutes Max
- c. Cleaner
 - i. Alternative cleaner
 - Isopropyl alcohol (IPA)
 - HCFC-225
 - ii. Aqueous agent
 - Surface Active Agent Type (Clean through-750H)
 - Hydrocarbon Type (Techno Cleaner-335)
 - Higher Alcohol Type (Pine Alpha ST-100S)
 - Alkali saponifier Type (※ Aqua Cleaner 240)
 - ※ Alkali saponification shall be diluted to 20% volume with de-ionized water.
 - ※ Please contact our technical service department before using other cleaner.
- d. There shall be no residual flux and residual cleaner after cleaning. In the case of using aqueous agent, product shall be dried completely after rinse with de-ionized water in order to remove the cleaner.
- e. Some products may become slightly whitened. However, product performance or usage is not affected.
- f. Please take care of winding part while cleaning.
- g. After cleaning, parts could be subjected to the next reflow soldering till the solvent remaining on surface of parts being volatilized.

14 Precautions

14.1 Surface mounting

- Mounting and soldering condition should be checked beforehand.
- Applicable soldering process to this product is reflow soldering only.
- Recommended conditions for repair by soldering iron:
 - Preheat the circuit board with product to repair at 150°C for about 1 minute.
 - Put soldering iron on the land-pattern.
 - Soldering iron's temperature: 350°C maximum/Duration: 3 seconds maximum/1 time for each terminal.
 - The soldering iron should not directly touch the inductor.
 - Product once removes from the circuit board may not be used again.

14.2 Handling

- Keep the products away from all magnets and magnetic objects.
- Be careful not to subject the products to excessive mechanical shocks.
- Please avoid applying impact to the products after mounted on pc board.
- Avoid ultrasonic cleaning.

14.3 Storage

- To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.
- Recommended conditions: -10°C~40°C, 70%RH (Max.)
- Even under ideal storage conditions, solderability of products electrodes may decrease as time passes. For this reason, product should be used with one year from the time of delivery.
- In case of storage over 6 months, solderability shall be checked before actual usage.

14.4 Regarding Regulations

- Any Class- I or Class- II ozone-depleting substance (ODS) listed in the Clean Air Act in US for regulation is not included in the products or applied to the products at any stage of whose manufacturing processes.
- Certain brominated flame retardants (PBBs,PBDEs) are not used at all.
- The products of this specification are not subject to the Export Trade Control Order in China or the Export Administration Regulations in US.

14.5 Guarantee

- The guaranteed operating conditions of the products are in accordance with the conditions specified in this specification.
- Please note that Sunlord takes no responsibility for any failure and/or abnormality which is caused by use under other than the aforesaid operating conditions.

for Automotive Electronics