

# 汽车电子


Automotive Product  
Selection Guide

# Sunlord

**Sunlord**  
expert in e components

# 汽车电子

AUTOMOTIVE **2023-2024**  
PRODUCT SELECTION GUIDE

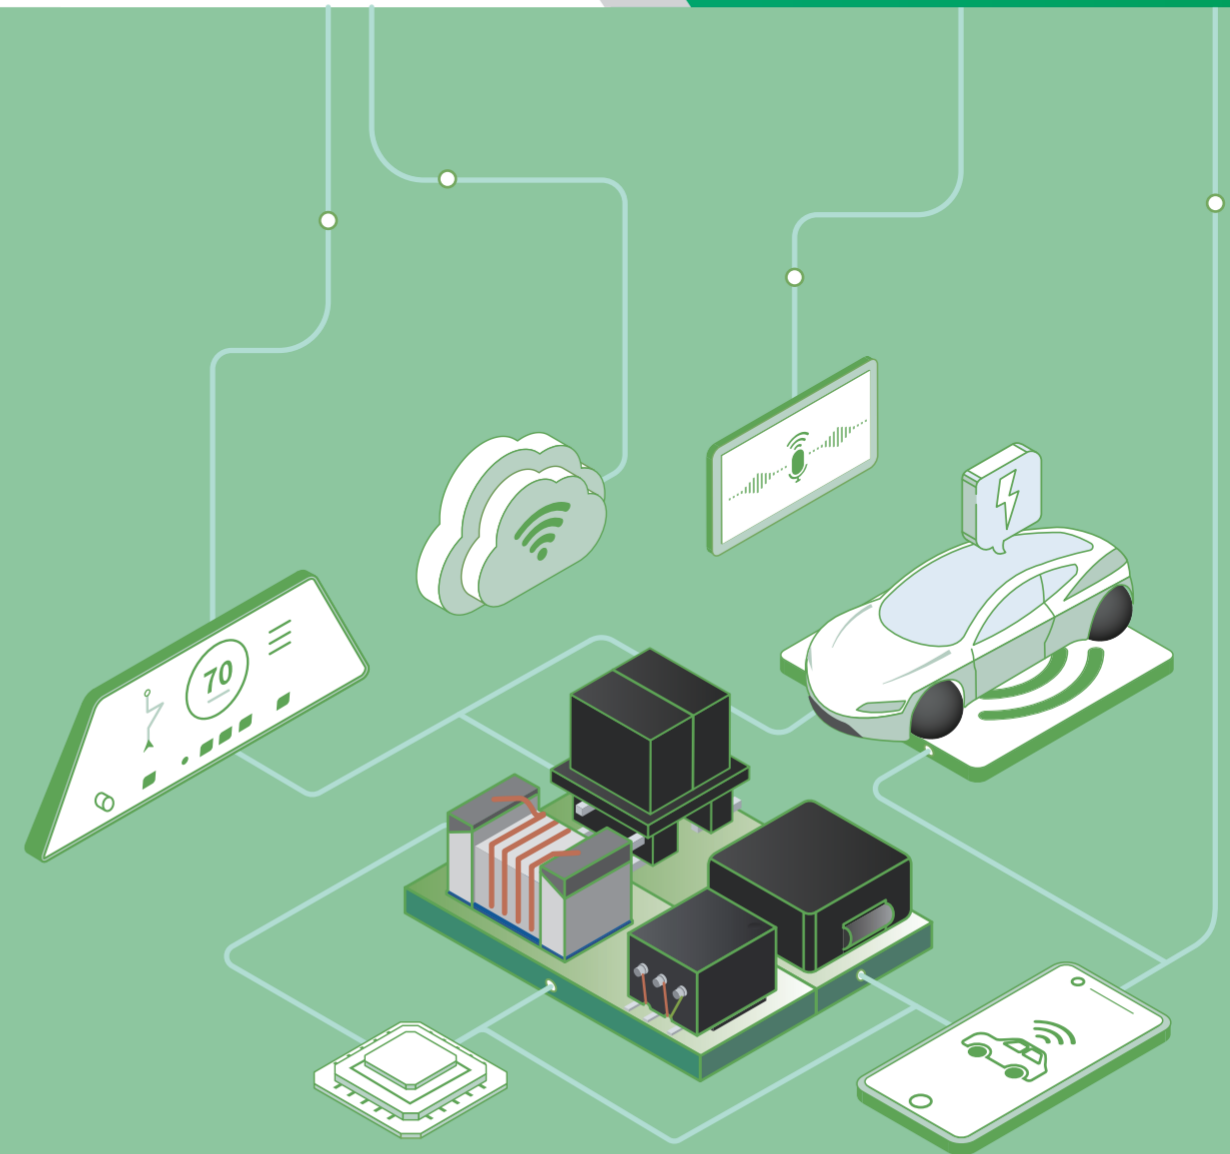

深圳顺络电子股份有限公司  
Shenzhen Sunlord Electronics Co., Ltd.  
中国深圳市龙华区观光路观澜大富苑顺络工业园  
Sunlord Industrial Park, Dafuyuan, Guanlan, Guangguang Road, Longhua District, Shenzhen, China  
Tel: 86-755-2983 2380 2983 2660  
Fax: 86-755-8226 9029  
E-mail: sunlord@sunlordinc.com

东莞顺络电子有限公司  
Dongguan Sunlord Electronics Co., Ltd.  
中国广东省东莞市塘厦镇凤泰路1号  
No. 1, Fengtai Road, Tangxia, Dongguan, Guangdong, China  
Tel: 86-0769-8916 9999



[www.sunlordinc.com](http://www.sunlordinc.com)

深圳顺络电子股份有限公司  
Shenzhen Sunlord Electronics Co., Ltd.

## 共模扼流器 COMMON MODE FILTER

### 用于CAN总线 for CAN BUS

#### AMCW-B Series 绕线 Wire Wound



AMCW3225B



AMCW4532B

尺寸 L×W×H (mm)	3.2×2.5×2.35	4.5×3.2×2.55
电感量 Inductance @100KHz/0.1mA(uH)	11-100	11-100
额定电流 Rated Current (mA)	150-400	200-360

#### ACSR Series 绕线磁环 Wire Wound Magnet Ring



ACSR0906

尺寸 L×W×H (mm)	9.0×6.0×4.8
电感量 Inductance @100KHz/0.1mA(uH)	5-4700
额定电流 Rated Current (mA)	400-1200

### 用于CAN FD for CAN FD

#### AMCW-F Series 绕线 Wire Wound



AMCW3225F



AMCW4532F

尺寸 L×W×H (mm)	3.2×2.5×2.2	4.5×3.2×2.3
电感量 Inductance @100KHz/0.1V(uH)	100+50/-30%	100+50/-30%
额定电流 Rated Current (mA)	150	200

### 用于以太网 for Ethernet

#### AMCW-L Series 绕线 Wire Wound



AMCW3225L



AMCW4532L

尺寸 L×W×H (mm)	3.2×2.5×2.2	4.5×3.2×2.3
电感量 Inductance @100KHz/0.1V(uH)	*100+50/-40% 200+50/-20%	200+50/-25%
额定电流 Rated Current (mA)	70-150	110
用途 Application	*: for A2B 100Base-T1	100Base-T1

#### AMCW-G Series 绕线 Wire Wound

NEW



AMCW3225G

尺寸 L×W×H (mm)	3.2×2.5×2.2
电感量 Inductance @100KHz/0.1V(uH)	80+50/-25%
额定电流 Rated Current (mA)	100
用途 Application	1000Base-T1

### 用于电源线 for Power Line

#### AMCW-P Series 绕线 Wire Wound



AMCW3225P

尺寸 L×W×H (mm)	3.2×2.5×2.35
阻抗 Impedance@100MHz(Ω)	500-2400
额定电流 Rated Current (mA)	1100-2200

### 用于USB 2.0 for USB 2.0

#### AMCW-S Series 绕线 Wire Wound



AMCW2012S

尺寸 L×W×H (mm)	2.0x1.27x1.2
阻抗 Impedance@100MHz(Ω)	67-480
额定电流 Rated Current (mA)	280-420

## 电感 INDUCTOR

### 射频用 (叠层) for RF (Multilayer)

#### ASDCL Series 陶瓷 Ceramic

NEW



ASDCL03Q



ASDCL1005



ASDCL1608-A01

尺寸 L×W×H (mm)	0.6×0.3×0.3	1.0×0.5×0.5	1.6×0.8×0.8 1.65×0.8×0.8
电感量 Inductance (nH)	0.6-120	0.6-180	1.0-470
额定电流 Rated Current (mA)	80-850	100-800	150-500

### 射频用 (绕线) for RF (Wire Wound)

#### AWL-C Series 陶瓷 Ceramic



AWL1005C-M01



AWL1005C-M81

尺寸 L×W×H (mm)	1.1×0.55×0.6	1.1×0.55×0.6
电感量 Inductance (nH)	1.5-100	1.3-75
额定电流 Rated Current (mA)	120-1000	320-3150

### PoC用 (绕线) for PoC (Wire Wound)

#### AWL3225FP Series 铁氧体 Wire Wound



AWL3225FP

尺寸 L×W×H (mm)	3.2×2.5×2.3
电感量 Inductance (μH)	2.2-47
额定电流 Rated Current (mA)	300-1000

### 信号线 (绕线) for Signal Line (Wire Wound)

#### AWL1608FS Series 铁氧体 Ferrite

NEW



AWL1608FS-M01

尺寸 L×W×H (mm)	1.6×0.8×0.8
电感量 Inductance (nH)	100-650
额定电流 Rated Current (mA)	430-1000

### 信号线 (绕线) for Signal Line (Wire Wound)

#### AWL4532FP Series 铁氧体 Wire Wound

NEW



AWL4532FP

尺寸 L×W×H (mm)	4.5×3.2×2.9
电感量 Inductance (μH)	220
额定电流 Rated Current (mA)	220

#### AWL4532FS Series 铁氧体 Wire Wound

NEW





AWL4532FS

尺寸 L×W×H (mm)	4.5×3.2×2.9
电感量 Inductance (μH)	10
额定电流 Rated Current (mA)	650

## 电感 INDUCTOR




### 信号线 (绕线) for Signal Line (Wire Wound)

**AMPR Series**  
二合一电感  
2in1 Inductor

	
<b>AMPR0607H</b>	<b>AMPR1009H</b>
尺寸 L×W×H (mm)	6.9×7.6×7.3      10.2×9.2×10.8
电感量 Inductance (μH)	3.3-22      3.3-22
额定电流 Rated Current (A)	2.0-5.1      3.2-8.0





### 电源线用 (绕线) for Power Line (Wire Wound)

**ASWPA Series**  
磁屏蔽结构  
Magnetic Shielded

		
<b>ASWPA4035</b>	<b>ASWPA6055</b>	<b>ASWPA8050</b>
尺寸 L×W×H (mm)	4.0×4.0×3.5      6.0×6.0×5.5      8.0×8.0×5.0	
电感量 Inductance (μH)	0.47-150      3.3-470      1.0-470	
额定电流 Rated Current (A)	0.35-5.2      0.45-3.95      0.5-6.3	



### 电源线用 (绕线) for Power Line (Wire Wound)

**AMWPH Series**  
磁屏蔽结构  
Magnetic Shielded

				
<b>AMWPH3015</b>	<b>AMWPH4012</b>	<b>AMWPH4018</b>	<b>AMWPH5030</b>	<b>AMWPH6045</b>
尺寸 L×W×H (mm)	3.0×3.0×1.5      4.0×4.0×1.2      4.0×4.0×1.8      5.0×5.0×2.9      6.0×6.0×4.4			
电感量 Inductance (μH)	1.0-100      1.0-15      1.0-100      0.33-33      0.55-120			
额定电流 Rated Current (A)	0.2-2.0      0.6-2.2      0.4-2.7      0.7-5.3      0.7-5.9			






### 电源线用 (绕线) for Power Line (Wire Wound)

**AMWPB Series**  
磁屏蔽结构  
Magnetic Shielded

	
<b>AMWPB6045</b>	<b>AMWPB7045</b>
尺寸 L×W×H (mm)	6.5×6.0×4.5      7.4×7.0×4.5
电感量 Inductance (μH)	1.0-10      1.0-22
额定电流 Rated Current (A)	2.6-5.9      1.7-6.2

### 电源线用 (绕线) for Power Line (Wire Wound)







**AS1A Series**  
磁屏蔽结构  
Magnetic Shielded

					
<b>AS1A201610</b>	<b>AS1A201612</b>	<b>AS1A2010</b>	<b>AS1A2012</b>	<b>AS1A252010</b>	<b>AS1A252012</b>
尺寸 L×W×H (mm)	2.0×1.6×1.0      2.0×1.6×1.2      2.0×2.0×1.0      2.0×2.0×1.2      2.5×2.0×1.0      2.5×2.0×1.2				
电感量 Inductance (μH)	0.24-15      1.0-22      0.47-4.7      1.0-4.7      0.24-10      0.24-47				
额定电流 Rated Current (A)	0.34-2.70      0.36-2.00      0.76-2.00      0.7-1.70      0.49-3.00      0.30-3.20				

## 电感 INDUCTOR







### 电源线用 (绕线) for Power Line (Wire Wound)

**AS1A Series**  
磁屏蔽结构  
Magnetic Shielded

					
<b>AS1A2410</b>	<b>AS1A2412</b>	<b>AS1A322517</b>	<b>AS1A3010</b>	<b>AS1A3012</b>	<b>AS1A3015</b>
尺寸 L×W×H (mm)	2.4×2.4×1.0      2.4×2.4×1.2      3.2×2.5×1.7      3.0×3.0×1.0      3.0×3.0×1.2      3.0×3.0×1.5				
电感量 Inductance (μH)	0.68-22      0.47-10      0.47-22      1.2-47      0.47-22      0.47-100				
额定电流 Rated Current (A)	0.30-1.57      0.45-2.10      0.60-3.25      0.25-1.48      0.50-1.90      0.21-3.10				







### 电源线用 (绕线) for Power Line (Wire Wound)

**AS1A Series**  
磁屏蔽结构  
Magnetic Shielded

					
<b>AS1A4010</b>	<b>AS1A4012</b>	<b>AS1A4015</b>	<b>AS1A4018</b>	<b>AS1A4020</b>	<b>AS1A4026</b>
尺寸 L×W×H (mm)	4.0×4.0×1.0      4.0×4.0×1.2      4.0×4.0×1.5      4.0×4.0×1.8      4.0×4.0×2.0      4.0×4.0×2.6				
电感量 Inductance (μH)	1.0-22      1.0-22      0.47-22      1.0-220      1.0-220      0.47-330				
额定电流 Rated Current (A)	0.45-1.90      0.50-2.20      0.64-3.60      0.17-3.20      0.33-3.66      0.22-4.30				







### 电源线用 (绕线) for Power Line (Wire Wound)

**AS1A Series**  
磁屏蔽结构  
Magnetic Shielded

					
<b>AS1A4030</b>	<b>AS1A5010</b>	<b>AS1A5012</b>	<b>AS1A5014</b>	<b>AS1A5020</b>	<b>AS1A5030</b>
尺寸 L×W×H (mm)	4.0×4.0×3.0      5.0×5.0×1.0      5.0×5.0×1.2      5.0×5.0×1.4      5.0×5.0×2.0      5.0×5.0×3.0				
电感量 Inductance (μH)	1.0-22      1.0-22      1.0-15      0.47-22      0.47-100      0.47-100				
额定电流 Rated Current (A)	2.50-4.60      0.45-1.75      0.64-2.30      0.55-3.30      0.40-5.00      0.45-7.00				




### 电源线用 (绕线) for Power Line (Wire Wound)

**AS1A Series**  
磁屏蔽结构  
Magnetic Shielded

					
<b>AS1A5040</b>	<b>AS1A6010</b>	<b>AS1A6012</b>	<b>AS1A6014</b>	<b>AS1A6020</b>	<b>AS1A6028</b>
尺寸 L×W×H (mm)	5.0×5.0×4.0      6.0×6.0×1.0      6.0×6.0×1.2      6.0×6.0×1.4      6.0×6.0×2.0      6.0×6.0×2.8				
电感量 Inductance (μH)	1.0-100      1.5-22      1.0-100      1.2-22      0.8-22      0.9-100				
额定电流 Rated Current (A)	0.50-4.10      0.65-1.90      0.32-2.40      0.95-2.75      0.95-4.10      0.65-4.60				

### 电源线用 (绕线) for Power Line (Wire Wound)

**AS1A Series**  
磁屏蔽结构  
Magnetic Shielded

		
<b>AS1A6045</b>	<b>AS1A8030</b>	<b>AS1A8040</b>
尺寸 L×W×H (mm)	6.0×6.0×4.5      8.0×8.0×3.0      8.0×8.0×4.0	
电感量 Inductance (μH)	1.0-470      1.0-47      10-47	
额定电流 Rated Current (A)	0.38-6.20      1.10-6.20      1.50-3.10	

电感 INDUCTOR

电源线用 (绕线) for Power Line (Wire Wound)

AS1B Series  
磁屏蔽结构  
Magnetic Shielded

NEW

AS1B201610	AS1B201612	AS1B252010	AS1B252012	AS1B3012	AS1B4012	
尺寸 L×W×H (mm)	2.0×1.6×1.0	2.0×1.6×1.2	2.5×2.0×1.0	2.5×2.0×1.0	3.0×3.0×1.2	4.0×4.0×1.2
电感量 Inductance (μH)	0.24-10	0.24-2.2	0.33-10	0.24-10	0.33-10	0.33-22
额定电流 Rated Current (A)	0.65-3.00	1.70-4.50	0.80-3.50	0.85-4.50	1.00-4.20	0.90-4.30

电源线用 (绕线) for Power Line (Wire Wound)

AS1B Series  
磁屏蔽结构  
Magnetic Shielded

NEW

AS1B4018	AS1B4020	
尺寸 L×W×H (mm)	4.0×4.0×1.8	4.0×4.0×2.0
电感量 Inductance (μH)	2.2-10	0.47-10
额定电流 Rated Current (A)	2.25-4.20	2.00-8.00

电源线用 (绕线) for Power Line (Wire Wound)

AMP Series  
模压电感 Molding Inductor

NEW

AMP0402H	AMP0503H	AMP0603H	AMP0605H	AMP0703H	AMP0705H	AMP0804H	
尺寸 L×W×H (mm)	4.4×4.2×1.8	5.6×5.2×2.8	7.0×6.6×2.8	7.0×6.6×4.8	7.6×7.0×2.8	7.6×7.0×5.2	8.8×8.2×3.8
电感量 Inductance (μH)	0.1-10	0.1-15	0.05-47	0.47-47	1.0-10	1.0-100	0.07-15
额定电流 Rated Current (A)	1.8-15	2.0-18	1.4-32	2.08-16.8	4.2-14	1.9-15.8	4.8-51

电源线用 (绕线) for Power Line (Wire Wound)

AMP Series  
模压电感 Molding Inductor

NEW

AMP1004H	AMP1005H	AMP1006H	AMP1204H	AMP1205H	AMP1206H	AMP1707H	
尺寸 L×W×H (mm)	11×10×3.8	11×10×5.2	11×10×6.3	13.5×12.6×4.3	13.5×12.6×4.8	13.5×12.6×6.2	17.2×17×6.9
电感量 Inductance (μH)	0.08-100	0.68-100	1.5-22	0.1	0.33-47	0.47-100	1.0-100
额定电流 Rated Current (A)	2.1-44	2.4-27	5.5-19.5	43	3.5-40	3.5-45	4.0-38

电源线用 (绕线) for Power Line (Wire Wound)

AS2A Series  
模压电感 Molding Inductor

NEW

AS2A201612	AS2A252012	AS2A322512	AS2A252020	AS2A322515	AS2A322520	
尺寸 L×W×H (mm)	2.0×1.6×1.2	2.5×2.0×1.2	3.2×2.5×1.2	2.5×2.0×2.0	3.2×2.5×1.5	3.2×2.5×2.0
电感量 Inductance (μH)	0.1-6.8	0.1-10	0.1-15	0.082	4.7-47	0.01-0.33
额定电流 Rated Current (A)	0.8-9.0	1.1-10	0.9-13	14.9	0.67-2.0	12-45

电感 INDUCTOR

电源线用 (绕线) for Power Line (Wire Wound)

AS3A Series  
模压电感 Molding Inductor

NEW

AS3A201612	AS3A252012	
尺寸 L×W×H (mm)	2.0×1.6×1.2	2.5×2.0×1.2
电感量 Inductance (μH)	0.1-4.7	0.1-6.8
额定电流 Rated Current (A)	1.2-9	1.2-7.7

电源线用 (绕线) for Power Line (Wire Wound)

AHTF Series  
共烧型电感 Co-fired Inductor

NEW

AHTF070415	AHTF100424	AHTF130517	AHTF120840	
尺寸 L×W×H (mm)	7.0×4.5×1.3	10.0×4.0×2.4	12.8×4.8×1.7	12.8×8.2×4.0
电感量 Inductance (nH)	50	100	140	220
额定电流 Rated Current (A)	40	38	36	38

电源线用 (绕线) for Power Line (Wire Wound)

AMWPQ Series  
磁屏蔽结构  
Magnetic Shielded

NEW

AMWPQ2815L	AMWPQ2818L	AMWPQ3316T	AMWPQ2616S	
尺寸 L×W×H (mm)	25.5×27.0×15.5	25.5×27.0×17.5	33×33×16	26.5×26.5×16.5
电感量 Inductance (μH)	1.5-33	3.3-33	3.3-4.7	1.0-2.2
额定电流 Rated Current (A)	2.0-34	7.0-36	50	60

电源线用 (绕线) for Power Line (Wire Wound)

AWPE Series  
绕线 Wire Wound

AWPE101006H	
尺寸 L×W×H (mm)	10.2×10.0×6.2
电感量 Inductance (μH)	1-8.2
额定电流 Rated Current (A)	8.4-22

耦合电感 (绕线) Coupled Inductor (Wire Wound)

ACPR Series  
磁屏蔽结构  
Magnetic Shielded

ACPR1208	ACPR1210	
尺寸 L×W×H (mm)	12.5×12.5×8.5	12.5×12.5×10.5
电感量 Inductance (μH)	4.7-100	3.9-33
额定电流 Rated Current (A)	1.5-5.0	3.1-7.0

ALPR Series  
磁屏蔽结构  
Magnetic Shielded

ALPR1208S	
尺寸 L×W×H (mm)	12.1×12.1×8
电感量 Inductance (μH)	4.7-100
额定电流 Rated Current (A)	2.2-7.2

## 磁珠 FERRITE BEAD

### 低速信号线用 for Low Speed Signal Line

#### AGZ Series 叠层 Multilayer

	AGZ15	AGZ18	AGZ21
尺寸 L×W×H (mm)	1.0×0.5×0.5	1.6×0.8×0.8	2.0×1.25×0.85
阻抗 Impedance (Ω)	600	80-2000	40-1000
直流电阻 DCR (mΩ) Max.	600	150-900	100-270
额定电流 Rated Current (A)	0.3	0.2-0.5	0.6-1

### 高速信号线用 for High Speed Signal Line

#### ASZ Series 叠层 Multilayer

	ASZ18	ASZ21
尺寸 L×W×H (mm)	1.6×0.8×0.8	2.0×1.25×1.25
阻抗 Impedance (Ω)	330-2500	2250
直流电阻 DCR (mΩ) Max.	600-1600	600
额定电流 Rated Current (A)	0.15-0.25	0.25

### 电源线用 for Power Line

#### APZ Series 叠层 Multilayer

	APZ15	APZ18	APZ21
尺寸 L×W×H (mm)	1.0×0.5×0.5	1.6×0.8×0.6	2.0×1.25×1.25
阻抗 Impedance (Ω)	120	100	100-470
直流电阻 DCR (mΩ) Max.	95	45	50-250
额定电流 Rated Current (A)	1.5	2	0.8-2

### 电源线用 for Power Line

#### AUPZ Series 叠层 Multilayer

	AUPZ18	AUPZ21	AUPZ31
尺寸 L×W×H (mm)	1.6×0.8×0.8 1.6×0.8×0.6	2.0×1.25×0.85	3.2×1.6×1.1 3.2×1.6×1.6
阻抗 Impedance (Ω)	30-1000	22-600	33-1000
直流电阻 DCR (mΩ) Max.	10-300	9-100	9-80
额定电流 Rated Current (A)	0.8-5	2-6	1.5-6

#### AEPZ Series 叠层 Multilayer

	AEPZ4030
尺寸 L×W×H (mm)	4.0×3.0×1.6
阻抗 Impedance (Ω)	56
直流电阻 DCR (mΩ) Max.	4
额定电流 Rated Current (A)	10

## NTC 热敏电阻 NTC THERMISTOR

### 车载用 for Automotive

#### ASDNT Series 叠层 Multilayer

	ASDNT1005	ASDNT1608
尺寸 L×W×H (mm)	1.0×0.5×0.5	1.6×0.8×0.8
电阻 Resistance at 25°C (kΩ)	10-100	10-100
B常数 B Constant (K)	3380-4250	3380-4250
最大容许工作电流 Max. Permissible Operating Current (mA)	0.1-0.31	0.1-0.31

## LTCC 器件 LTCC COMPONENT

### 耦合器 Coupler

#### ASLCP Series 叠层 Multilayer

	ASLCP18	ASLCP22
尺寸 L×W×H (mm)	1.6×0.8×0.6	2.5×2.0×0.9
带宽 Bandwidth (MHz)	698-960 1710-2170 2300-2690	1150-1650

### 带通滤波器 Band-pass Filter

#### ASLFB Series 叠层 Multilayer

	ASLFB18	ASLFB19	ASLFB21	ASLFB22
尺寸 L×W×H (mm)	1.6×0.8×0.6 1.6×0.8×0.7 1.6×0.8×0.75	1.1×0.9×0.6	2.0×1.25×0.7	2.5×2.0×0.9
带宽 Bandwidth (MHz)	1780-2025 2400-2500 5150-5950 6240-8250	2400-2500	3300-4200 4400-5000	5725-5925

### 低通滤波器 Low-pass Filter

#### ASLFL Series 叠层 Multilayer

	ASLFL15	ASLFL18
尺寸 L×W×H (mm)	1.0×0.5×0.4	1.6×0.8×0.6
带宽 Bandwidth (MHz)	1710-2025 2300-2700	663-960 698-960 699-2690 1710-2690

### 高通滤波器 High-pass Filter

#### ASLFH Series 叠层 Multilayer

	ASLFH18
尺寸 L×W×H (mm)	1.6×0.8×0.6
带宽 Bandwidth (MHz)	2300-2690

### 双工器 Diplexer

#### ASLFD Series 叠层 Multilayer

	ASLFD18	ASLFD21	ASLFD22
尺寸 L×W×H (mm)	1.6×0.8×0.6	2.0×1.25×0.9 2.0×1.25×0.65	2.5×2.0×0.9 2.5×2.0×0.8 2.5×2.0×0.7
频率 Frequency (MHz)	698-8200	617-5925	450-5950

### 三工器 Triplexer

#### ASLFT Series 叠层 Multilayer

	ASLFT22
尺寸 L×W×H (mm)	2.5×2.0×0.9
带宽 Bandwidth (MHz)	617-5925

## LTCC器件 LTCC COMPONENT

### 平衡滤波器 Balanced Filter

ASLFBF Series  
叠层 Multilayer

NEW



ASLFBF18

尺寸 L×W×H (mm) 1.6×0.8×0.6  
带宽 Bandwidth (MHz) 2400-2500

### 天线 Antenna

ASLDA Series  
叠层 Multilayer

NEW



ASLDA18



ASLDA31



ASLDA81

尺寸 L×W×H (mm) 1.6×0.8×0.4 3.2×1.6×1.2 8.5×1.6×1.2  
带宽 Bandwidth (MHz) 2400-5850 100 Min. 2400-5900

## 电子变压器 ELECTRONIC TRANSFORMER

### 脉冲变压器 Pulse Transformer

ALTW Series



ALTW0805C



ALTW1209C

尺寸 L×W×H (mm) 7.9×6.1×6.8 12.7×10.2×10.5  
电感 Inductance (μH) 350 Min. 680 Min.  
用途 Application 以太网通讯隔离 Ethernet Communication Isolation BMS

### 小磁环变压器 Small Magnetic Ring Transformer

ALTWR Series

NEW




ALTWR-F02TF



ALTWR-F11TF




ALTWR-F14TF



ALTWR-C18TF



ALTWR-H06TF



ALTWR-G01TF

尺寸 L×W×H (mm) 9.27×7.62×5.72 19.5×9.95×5.0 27.85×12.0×6.0 12.8×7.5×3.5 12.5×9.2×7.6 12.7×9.7×5.8  
电感 Inductance (μH) 170-350 350 Min. 150-450 350 Min. 350±40% 350 Min.  
用途 Application BMS BMS BMS BMS 小功率电源用 Small Power Supply BMS, 远程通信模块, 以太网通信接口 BMS, Telecommunication Module and Ethernet Communication Circuit

### EP变压器 EP Transformer

ATWPEP Series  
定制品 Customized



ATWPEP060708



ATWPEP091111



ATWPEP121212



ATWPEP131515

尺寸 L×W×H (mm) 9.0×8.0×7.7 11.1×11.8×12.0 12.5×12×12.5 14.5×15.6×15.6  
电感 Inductance (μH) 1900-5500 / / /

### 电流互感器 Current Sense Transformer

ATWPEP Series  
定制品 Customized



ATWPEP060606B



ATWPEP070710B



ATWPEP121111B

尺寸 L×W×H (mm) 7.0×7.5×8.5 8.0×8.0×9.8 12.8×12.0×14.0

## 电子变压器 ELECTRONIC TRANSFORMER

### 栅极驱动变压器 Gate Drive Transformer


ATWPEF Series  
定制品 Customized



ATWPEF101406



ATWPEF122007



ATWPEF151513



ATWPEF182012




ATWPEF202217


尺寸 L×W×H (mm) 12.0×14.0×7.5 12.5×17.0×6.0 16.0×17.0×12.0 20.2×20.3×12.0 25.85×22.8×17.3

### PFC 扼流器 PFC Choke


ATWPEQ/AWPUU/  
ARLDC Series  
定制品 Customized



ATWPEQ363533



ARLDC504446




AWPUU7914


用途 Application PFC PFC PFC

### 谐振电感 Resonant Inductor

ATWPPQ Series  
定制品 Customized



ATWPPQ404440



ATWPPQ404243

用途 Application OBC 11KW OBC 6.6 KW

### DC-DC模块 DC-DC Module

ATWPPQ Series  
定制品 Customized



ATWPPQ50843



ATWPPQ407939


用途 Application DC-DC 3.5KW DC-DC 2.5KW

### LLC变压器 LLC Transformer


ATWPEQ Series  
定制品 Customized



ATWPPQ505551



ATWPPQ656264




ATWPPQ507852

用途 Application OBC 6.6KW OBC 22KW OBC 11KW


## 共模扼流器 COMMON MODE CHOKE

### 电源线用 for Power Line


ARCDC Series  
定制品 Customized



ARCDC646430



ARCDC372735



ARCDC606030

用途 Application 3 Phase CMC CMC 4 Phase CMC